

# STAR Case

**Case Number:** S1318000031

**Release Date:** 05/02/2020


## Symptom/Vehicle Issue:

CEL (Check Engine Lamp) on, DTC P0455 Evaporative System Large Leak

## Discussion:

A recent report indicates the CEL is on with DTC P0455 Evaporative System Large Leak stored or active. Inspection revealed an evaporative line loose crimp at the left shock tower location. Review the line in the suspect area, replace, re-position, and secure the hose as needed to repair.

Review Suspect Location

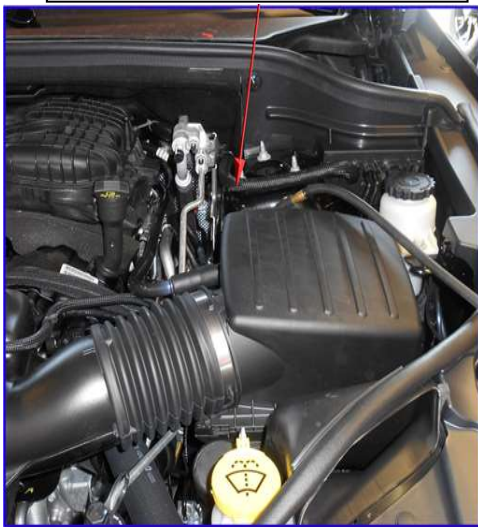

Review hose routing at the left shock tower.

**[Contact the STAR Center for assistance if no solution is found](#)**