


LATEST VEHICLE CONCERN FIXES

L663 LAUNCH INFORMATION



L663 Roof Opening Panel One Touch	20MY L663 Defender
<p>Customer Voice:</p> <ul style="list-style-type: none"> Unable to close sunroof with one touch <p>Technical Description:</p> <ul style="list-style-type: none"> Anti-trap will activate when attempting to use one touch to close <p>Status:</p> <ul style="list-style-type: none"> Issue is currently under investigation Use VCI Adapter to plug into OBD Ensure vehicle is in Power mode 7 (engine running) RE-initialize Roof Opening Panel(ROP) system using Pathfinder routine (ECU Diagnosis - BCM - Sunroof calibration_ 	 <p>The screenshot shows a software interface for ECU Diagnostics. At the top, there are tabs for 'ECU Diagnostics', 'Body Control Module (BCM)', and 'List of ECU functions'. Below the tabs, a list of ECU functions is displayed, including 'Alarm trigger history', 'Control Quiescent Current Relay', 'Enable Protected Outputs', 'Fuel Pump - Enable/Disable', 'On demand self test mode', 'Rain sensor calibration', 'Roof blind Calibration - Front', 'Roof blind Calibration - Rear', 'Steering column calibration', 'Sunroof calibration', and 'Valet mode reset'. The 'Sunroof calibration' item is highlighted with a grey background and has a black arrow pointing to it from the right.</p>

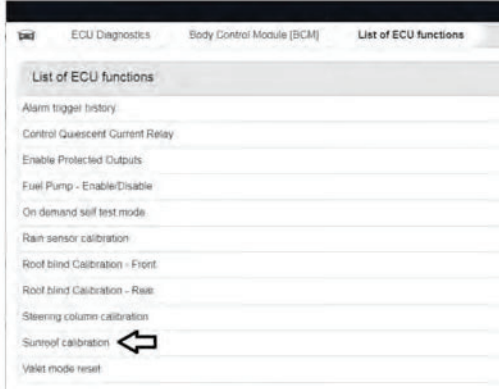