

Preliminary Information


PIP5741 2015 2018 8L45 8L90 No Movement After Valve Body Replacement.

<u>Models</u>

| Dronde | Model: | | Model Years: | VIN: | | Freeiner | - | |
|--|-----------|---|---|------|-----|----------|----------------|--|
| Brand: | | l: | | from | to | Engine: | Transmissions: | |
| Cadillac | ATS | | 2016 - 2018 | All | All | All | M5N, M5U | |
| Cadillac | СТ6 | | 2016 - 2018 | All | All | All | M5N | |
| Cadillac | СТЅ | | 2016 - 2018 | All | All | All | M5N, M5U | |
| Cadillac | Escalade | | 2016 - 2018 | All | All | All | M5U | |
| Chevrolet | Camaro | | 2016 - 2018 | All | All | All | M5T, M5U | |
| Chevrolet | Corvette | | 2015 - 2018 | All | All | All | M5U | |
| Chevrolet | Express | | 2017 - 2018 | All | All | All | M5U | |
| Chevrolet | Silverado | | 2016 - 2018 | All | All | All | M5U | |
| Chevrolet | Tahoe | | 2015 - 2018 | All | All | All | M5N | |
| GMC | Savana | | 2016 - 2018 | All | All | All | M5U | |
| GMC | Sierra | | 2016 - 2018 | All | All | All | M5U | |
| GMC | Yukon | | 2015 - 2018 | All | All | All | M5U | |
| Involved Region or Country North America | | | | | | | | |
| Condition 8L | | 8L45 | 8L45 or 8L90 transmissions with no movement after the valve body replacement. | | | | | |
| | | Plug and retaining bolt may be missing on valve body part numbers 24296270, 24296272, 24296273, 24297634 and 24297637. | | | | | | |

Correction:

Inspect for the plug and retaining bolt for being present in the picture shown below.

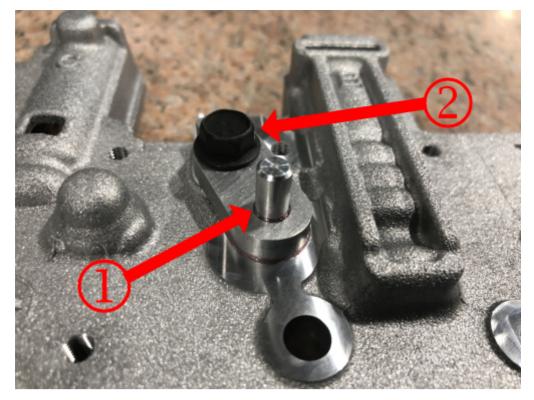

If the plug and retaining bolt are missing as shown in the picture below please fill out the WPC part request form and send it to the WPC following the instructions below.

The plug and retaining bolt are packaged as a kit.

The kit part number is WPC 853



The plug and bolt kit WPC part number WPC 853 can be obtained from the Warranty Parts Center (WPC) using the TSP Dealer Request Form

This form is located on:

Global Connect<Service Department<Service Forms Application<General Information tab<TSP Dealer Request Form.

Instructions for submitting are on the form.

Request WPC###. Warranty Information For vehicles repaired under the Powertrain coverage, use the following labor operation. Reference the Applicable Warranties section of Investigate Vehicle History (IVH) for coverage information.

| Labor Operation | Description | Labor Time |
|-----------------|--------------------------------|--------------------------|
| 8463690 | Control Valve Body Replacement | Use Published Labor Time |

Version History

| Version | 1 |
|----------|--------------------------|
| Modified | 06/22/2020 - Created on. |



GENERAL MOTORS

© 2020 General Motors. All Rights Reserved.