

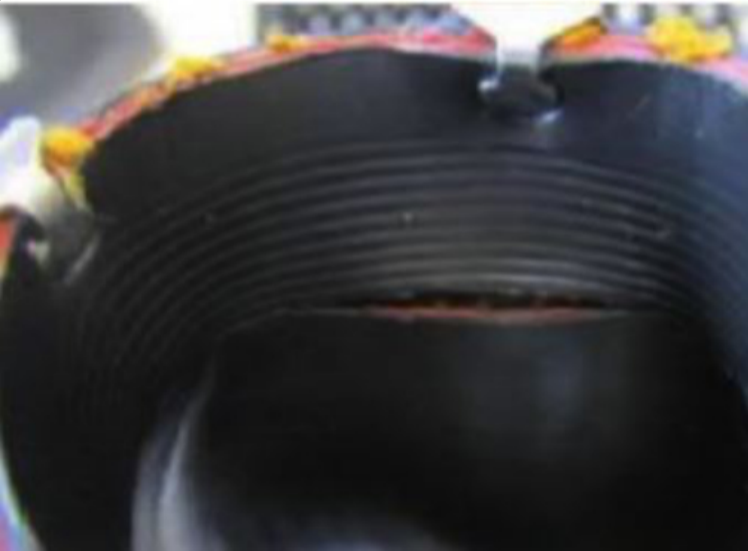


Preliminary Information

PIP5772 Reduced Engine Power and DTC P200C Set

Models

Brand:	Model:	Model Years:	VIN:		Engine:	Transmissions:
			from	to		
Cadillac (Russia)	XT4	2020 - 2021	All	All	2.0L (LSQ)	All

Involved Region or Country	Europe and Russia
Condition	A customer may complain of reduced engine power, a Service Engine Soon light displayed on the driver information center and a P200C may be set.
Cause	<p>The inside of the Charge Air Cooler Inlet Air Hose may be a cut (see the photo below).</p> 

Correction:

Follow P200C diagnostic and if damaged, replace the hose.

Engineering is currently working to root cause this concern.

This PI will be converted to a bulletin when a permanent resolution is available.

Parts Information

Description	Part Number	Quantity
HOSE ASM-CHRG AIR CLR INL AIR	55514756	1

Version History

Version	1
---------	---



© 2021 General Motors. All Rights Reserved.