

Technical product information

Topic	Bentayga front door trim - Alignment pin
Market area	Bentley: worldwide (2WBE)
Brand	Bentley
Transaction No.	2062338/1
Level	EH
Status	Approval
Release date	

New customer code

Object of complaint	Complaint type	Position
body fixtures and fittings -> trim, protective strips, brightware, dirt deflector -> door cover	component / consumables -> missing	
body fixtures and fittings -> doors -> door	high-volume parts -> missing bolt / nut	

Vehicle data

Bentayga

Sales types

Type	MY	Brand	Designation	Engine code	Gearbox code	Final drive code
4V1*	2017	E		*	*	*
4V1*	2018	E		*	*	*
4V1*	2019	E		*	*	*
4V1*	2020	E		*	*	*

Documents

Document name
master.xml

Customer statement / workshop findings

The alignment pin used to locate the front door trim panel is broken (Figure 1)

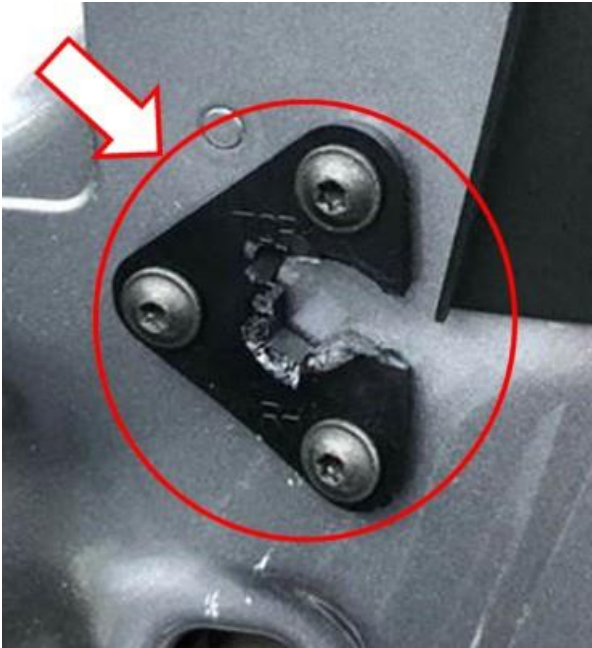


Figure 1

Technical background

Replacement parts are not available to order

Production change

Not applicable

Measure

▪ The front alignment pin is required to aid alignment of the door trim panel to the door panel during the Manufacturing process

NOTE: In Service the alignment pin is not required

NOTE: Replacement parts are not needed and are not available to order

Referring to Figure 1 – Remove and discard the following:

- Broken alignment pin x1 (If evident)
- Fixings x3
- Alignment pin plate x1

TIP: Cover the area in which the plate was previously fixed using anti creak tape

▪ If the condition is as shown in Figure 2 - The removal of the alignment pin/plate and fixings is not required unless broken



Figure 2

[Parts information](#)

Replacement parts are not available to order