



SPYDER RT 2020-21 Saddle Bags Hard To Open - 138444

[Printable Version](#)

Rate This Article

(Average Rating: No Rating)

Version 1

Language

English ▼

[Show Properties](#)**Summary:**

Some MY20-21 RT rear saddle bag lever can be hard to pull to open the saddle bag due to water intrusion in the latch cables.

Type:


General

TST Detail:**Problem:**


The rear saddle bag lever can be hard to pull and the lever can also break if too much force is needed.

Solution:


- Remove access covers 708303754, 708303755

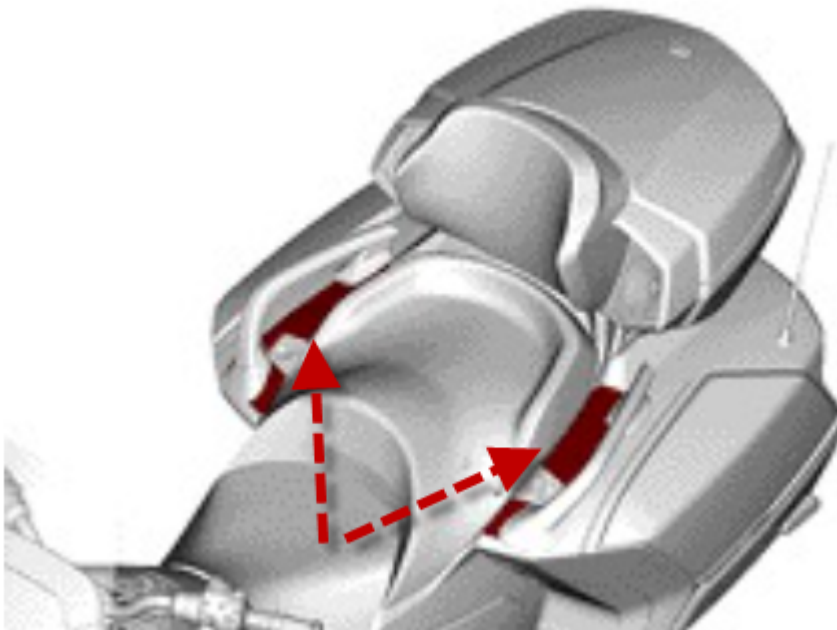

- From underneath (see video attached), grab and follow the cable.
 1. Pull the cable outward to unhook it from the plastic bracket.
 2. Then, lift the cable upwards and take the lead head out of the half-moon

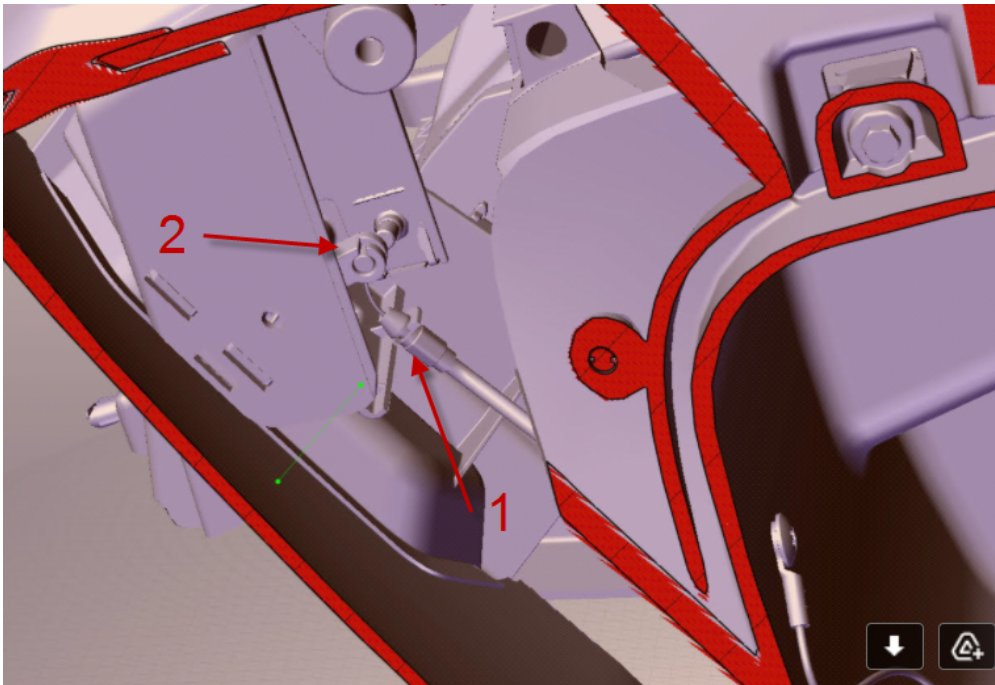

- Use BRP cable lubrication tool 529035738

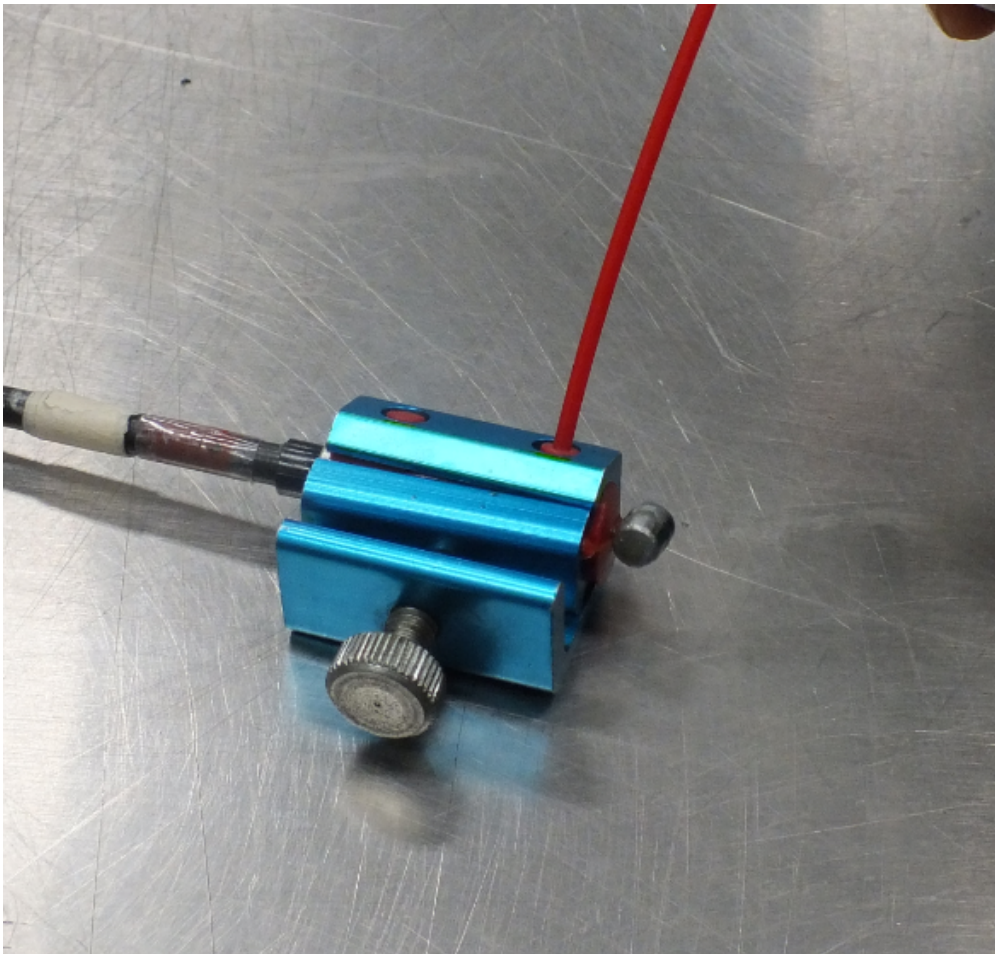

- Spray Chain Wax product in the tool orifice until you see the product dripping out of the cable other ends where the access covers are removed. This product can easily be found from any local supply shop or Amazon.



Warranty:

Regular Warranty applies

Attachment:

Saddlebag



First Published By: Eric Fauteux on 2021-02-10
Last Modified By: Eric Fauteux on 2021-02-17