



Countries: CANADA, UNITED STATES
Availability: ISIS, Fleet! ISIS, Body Builder, Not SIR
Major System: REAR AXLE
Current Language: English
Other Languages: NONE
Viewed: 74

Document ID: IK1400038
Revision: 0
Created: 3/4/2021
Last Modified: 3/11/2021
Author: Gintarus Andriusis

[Less Info](#)

Hide Details

Coding Information

Copy Link	Copy Relative Link	Bookmark	Add to Favorites	Print	Provide Feedback	Helpful	Not Helpful
		 View My Bookmarks				 0	 1

Title: Tridem Axle Oil Temperature Cluster Messages

Applies To: HV HX

Change Log

Please refer to the change log text box below for recent changes to this article:

03/08/2021 - Initial Article Release.

Description

This iKNOW article is to inform on Cluster Messages regarding Axle Oil Temperatures with tridem axle configuration

Symptoms

Diagnostic Trouble Codes & Dashboard Indicator Lights:

DTC/Light	Description
Cluster Message	High Forward Rear or Rear Rear Axle Temp


Customer Observations or Concerns:

- Axle Temperature cluster message

Observation


In tridem axle configuration, premium cluster only supports 2 axles for temperature messages

Axle 1 Temperature

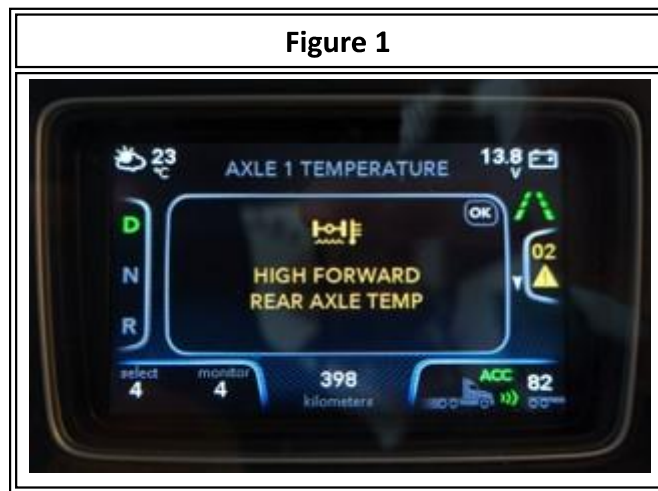

1. In tridem configuration, Forward Rear Axle does indicate axle 1, most forward rear axle

Axle 2 Temperature

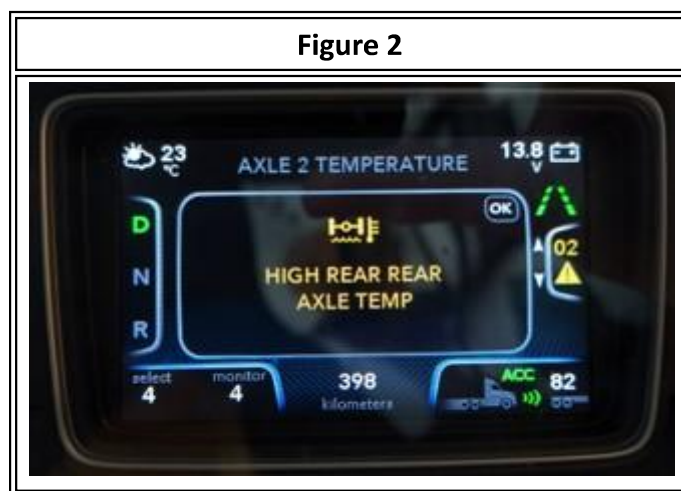

1. In tridem configuration, Rear Rear Axle indicates axle 2, the intermediate axle, **not** the most rear axle

Axle 3 Temperature

1. In tridem configuration, Axle 3 most Rear Rear axle, cluster oil temperature message is currently not supported

Warranty Information

Warranty Claim Coding:

Refer to the [Warranty Coding Manual](#) for Group and Noun Codes.

Standard Repair Time(s):

Refer to the [SRT Manual](#) for Repair Times

Other Resources

[Master Service Information Site](#)

 Hide Details

Feedback Information

Viewed: 73

Helpful: 0

Not Helpful: 1

No Feedback Found