

Dellcool refrigerator light

Bulletin Type:	TSB	Publication Date:	April 16, 2021
Bulletin #(s):	21-008	Make(s):	Jayco
Job Code(s):	9801567	Model(s):	Jay Flight SLX
Flat Rate(s):	.25 HR	Model Year(s):	2021

Incident:	12 Volt interior light activated by opening the door was not wired to the back of the Dellcool refrigerator.
Affected Units:	M77D0273 – M77D0320 M77J0393 – M77J0410 M77A0219 – M77A0266 M77E0249 – M77E0296
Misc. Tools & Supplies:	Wire Stripper/Crimpers 3" Piece-12 AWG / 12 Gauge orange wire 2 ea. - 12 AWG / 12 GA. insulated female spade terminals.

INSPECTION

Inspect the unit to confirm that it has a Dellcool refrigerator model XCD90BC - GAS/120V/12V. **Pic.1**
 Confirm that the 12VDC interior light does not come on when you open the door. If the light does not come on, verify if the refrigerator was wired to the light (+) terminal block at the back of the refrigerator. Once confirmed that the refrigerator light was not wired to the light (+) terminal **Pic.2**. Follow repair instructions.




Pic. 1



Pic. 2

REPAIR INSTRUCTIONS

1. Cut 3" section of orange 12 AWG / 12-gauge wire.
2. Depending on the size of the 12 AWG / 12-gauge insulated female spade terminal barrel, strip the correct length of insulation from the end of the 12 AWG / 12-gauge wire, using a wire stripper.
3. Crimp 12 AWG / 12-gauge insulated female spade terminal to each end of the stripped orange wire.
4. Install Jumper wire from Heater (+) positive terminal to Light (+) Terminal. Reference Legend.
5. Repair is complete. **Pic. 3**

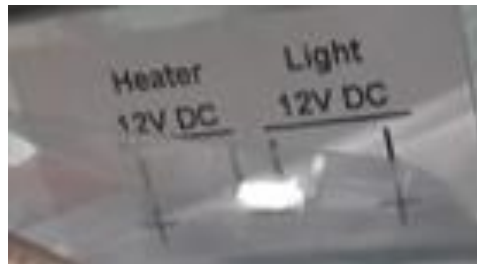

Legend



Pic. 3

Jayco's sole obligation under our limited warranty is to repair or replace defective materials and/or workmanship deemed our responsibility as determined by Jayco in our sole discretion. Jayco reserves the right to use new and/or remanufactured parts or materials of similar quality to complete any work, and to make parts and/or design changes as appropriate without notice to anyone. Jayco designs and/or materials changes are done without obligation to incorporate such changes in previously manufactured product. Jayco makes every reasonable effort to ensure field remedies will not adversely affect performance and/or safety of the unit. This field remedy is not intended to extend to future performance of this RV, or any of its materials, components or parts beyond the standard warranty period. The RV owner's obligation to notify Jayco, or one of its independent, authorized dealers, of a claimed defect does not modify any obligation placed on the RV owner to contact Jayco directly when attempting to pursue remedies under state or federal law. Jan. 2019.

903 South Main Street • P.O. Box 460 • Middlebury, IN 46540