



Bulletin No.: PIP5745A
Published date: 03/23/2021

Preliminary Information

PIP5745A MIL illuminated with DTC P026A

Models


Brand:	Model:	Model Years:	VIN:		Engine:	Transmissions:
			from	to		
Cadillac	Escalade models	2021	ALL	ALL	LM2	All
Chevrolet	Silverado 1500	2020 - 2021	ALL	ALL	LM2	All
Chevrolet	Suburban	2021	ALL	ALL	LM2	All
Chevrolet	Tahoe	2021	ALL	ALL	LM2	All
GMC	Sierra 1500	2020 - 2021	ALL	ALL	LM2	All
GMC	Yukon models	2021	ALL	ALL	LM2	All

Involved Region or Country:	North America
Condition:	A vehicle may arrive at the dealer with the MIL illuminated and DTC P026A set.
Cause:	This may be due to a kinked hose at or near the low temperature auxiliary coolant pump.

Correction:

If this condition is encountered, loosen the hose clamp and rotate the hose to allow for proper coolant flow.



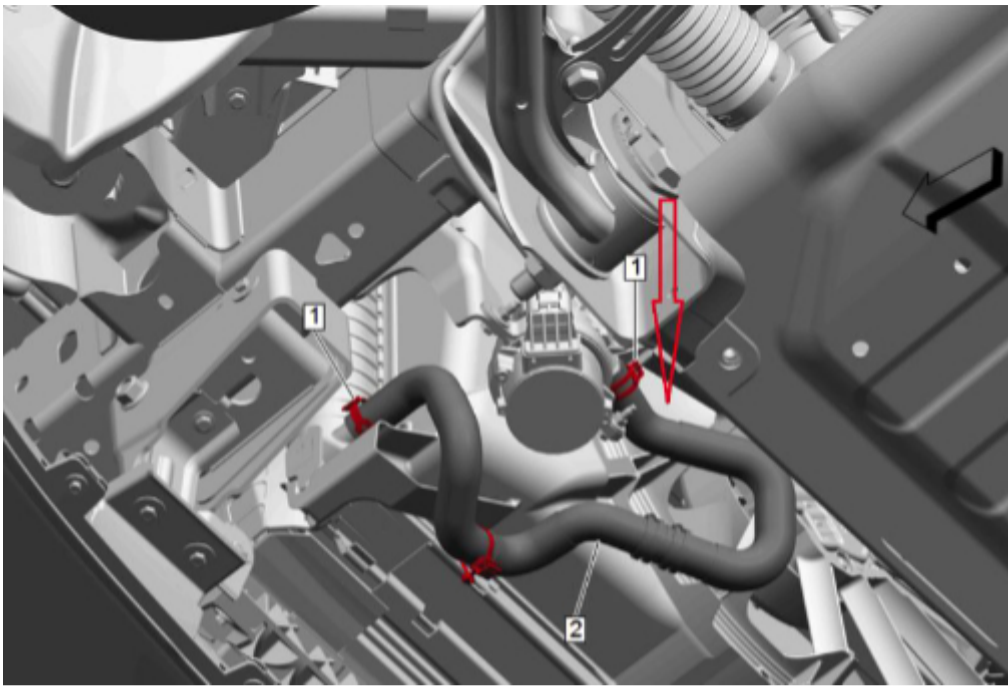

Version History

Version	2
Modified	07/29/2020 - Created on 03/23/2021 - Updated to add 2021 SUVs.



GENERAL MOTORS

© 2021 General Motors. All Rights Reserved.