



Technical Journal

TITLE:
Squeaking noise under front seats cushions

REF NO: US35817.2.0 en-US	ISSUING DEPARTMENT: Technical Service	CAR MARKET: United States and Canada	
PARTNER: 3 US 7510 Volvo Car USA		ISSUE DATE: 2020-03-03	STATUS DATE: 2021-03-08
FUNC GROUP: 8526	FUNC DESC: Adjustment device, assembly parts	Page 1 of 3	

“Right first time in Time”

Attachment

File Name	File Size
TJ 35817.pdf	0.1634 MB

Rows beginning with * are modified

Note! If using a printed copy of this Technical Journal, first check for the latest online version.

DESCRIPTION:

* New ending breakpoint.

If squeaking noise can be heard from the underside of a front seat cushion, see Service

CSC Customer Symptom Codes

Code	Description
ZD	Front seat/Squeak/rattle

DTC Diagnostic Trouble Codes

Vehicle Type

Type	Eng	Eng Desc	Sales	Body	Gear	Steer	Model Year	Plant	Chassis range	Struc Week Range
536							2019-2021		0000001-0548757	201746-202106

SERVICE:

Apply PTFE-spray as shown on picture “TJ 35817.pdf” (2 plastic holders on each front seat).

Raise the seat to the highest and apply from front.



Use PFTE-spray p/n 30749880.

Warranty claim info:

To get warranty claim accepted for a job described in this TJ, please use the attached VST OP number

VST Operation Number


VST Operation Number	Description
99921-2	General reimbursement acc. to TJ/QB

VEHICLE REPORT:

Yes, please submit a Vehicle Report if the service solution described in this TJ has no effect. Use concern area "Vehicle Report" and sub concern area "Support not needed", use function group 8526.

To view TJ attachment continue to next page. This TJ has one attachment.

VOLVO

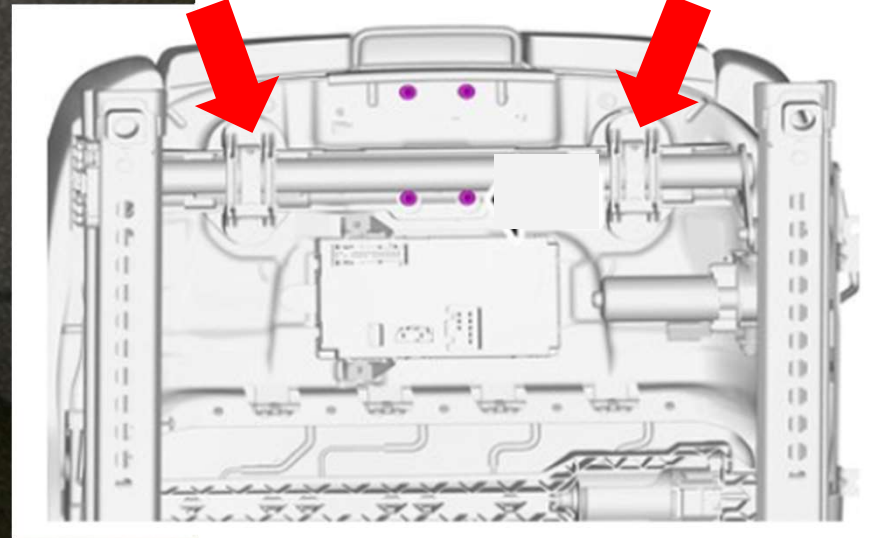

TJ 35817