



STAR ONLINE PUBLICATION




Case Number: S2108000097

Release Date: 04/16/2021

Symptom/Vehicle Issue: CEL (Check Engine Lamp) Lamp On, Vehicle Starts Has Reduced Power Or Limited Forward Movement Limp In When Placed In Gear

Customer Complaint/Technician Observation: Check engine lamp on, vehicle goes in gear; limp in mode with limited forward movement. Technician observed multiple DTC's stored or active P012D, P0443, U1412-00, P0033, U0415-00, P1B14-00, P2308, U016B-00, P1DAF-00, B2B95, U0402-00, C0511-00P1B14-00.

Repair Procedure: Inspect the XY201A Black 10-way connector when multiple DTC's are setting listed above. Inspect for loose unsecure connections or terminals that may be pushed out. Secure connector or any wiring TPO conditions to complete; no parts required.

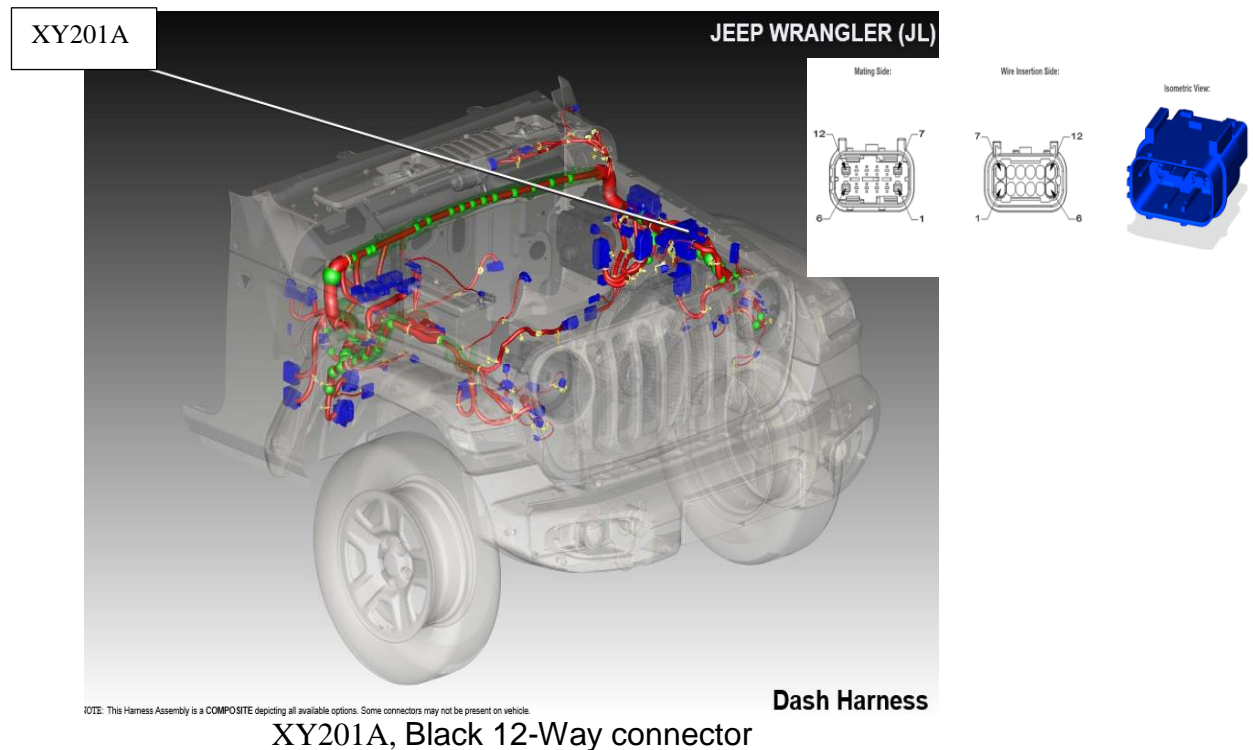

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

Contact STAR Center, or your Technical Assistance Center Via TechCONNECT or eCONTACT ticket if no solution is found