



Technical Bulletin 217

04.2021

Contents


Item	Subject	Model Affected
217.1	Triumph Shift Assist	Trident
217.2	Frame to Cylinder Head Left Hand Rear Mounting Bolt	Trident

Item: 217.1
Description: Triumph Shift Assist
Model Affected: Trident


It has come to our attention on the above model that if the battery has been disconnected/connected, the Triumph shift assist (TSA) will be disabled.

To enable the TSA, follow the procedure described below.

- From the Bike Setup menu, press the Up and Down buttons to select TSA.

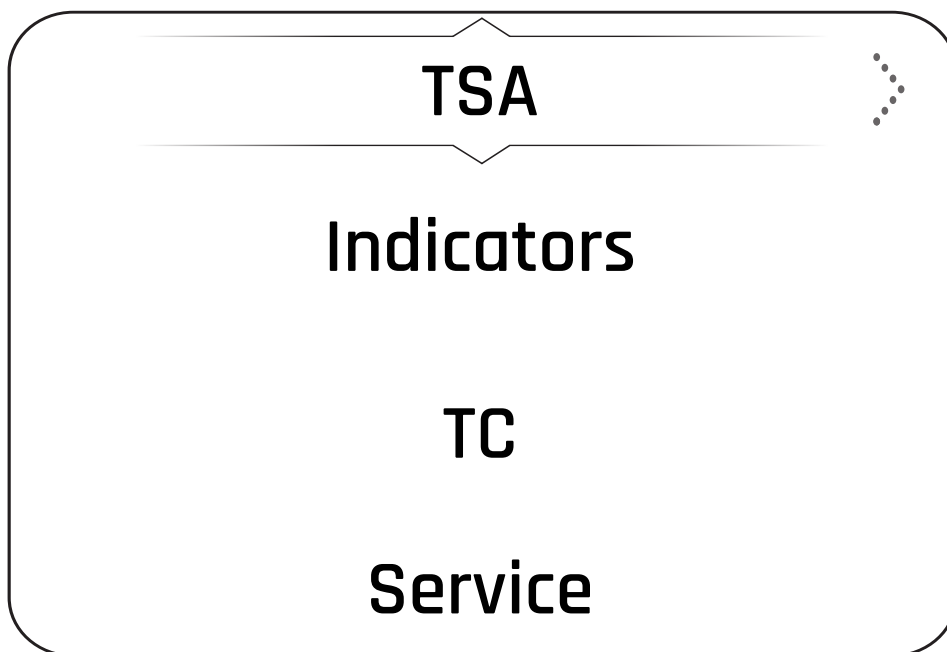


- Press the Right button to view the available options.

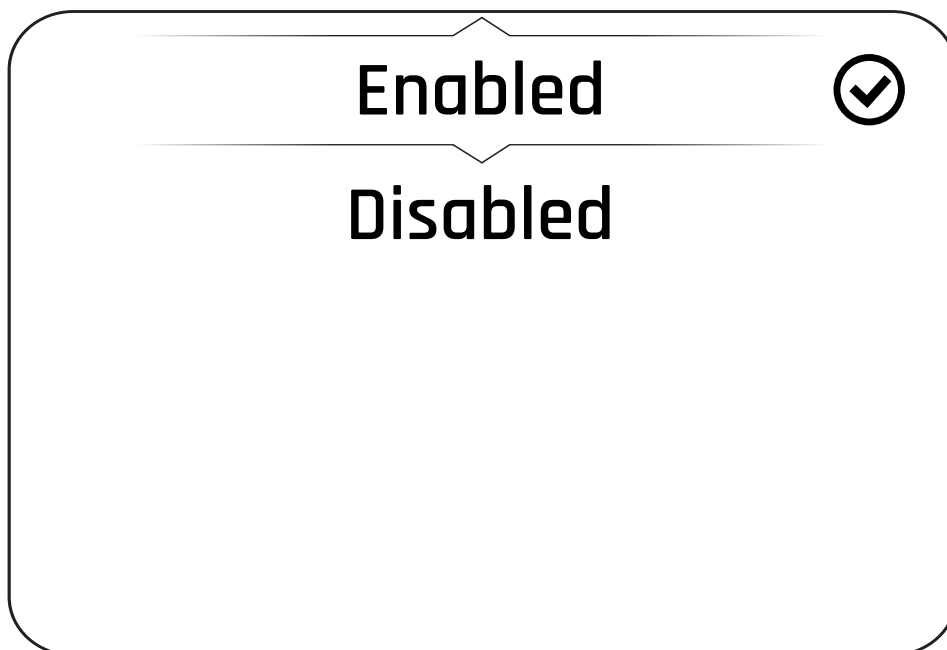

- Press the Up and Down buttons to select Enabled or Disabled.
- Press the Select button to confirm. A tick is shown to indicate the selected option.

Item: 217.2
Description: Frame to Cylinder Head Left Hand Rear Mounting Bolt
Model Affected: Trident

It has come to our attention on the above model that the frame to cylinder head left hand rear mounting bolt may damage the cylinder head threads when being removed or installed.
When removing/installing the frame to cylinder head left hand mounting bolt power/air tools must not be used. Hand tools must only be used.
Prior to installing the frame to cylinder head left hand rear mounting bolt, thoroughly clean the threaded part of the bolt and smear the first four threads with a proprietary copper based grease. The tightening sequence remains as described in the Service Manual.

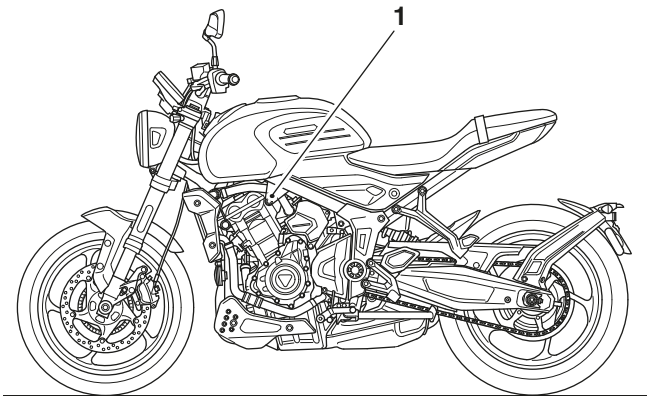

1. Left hand side rear frame to cylinder head bolt

Circulation

Initial and date when read and return to central file holder

Service Manager	Parts Manager	Sales Manager	Workshop Supervisor	Technician 1	Technician 2