



DTC U012100 - Lost Communication With Anti-Lock Brake System (ABS) Control Module





> Internal Content

Fault Code U012100 may be caused by poor connection at the X209 Ground Junction. If DTC is present do the following:

1. Disconnect the battery.
2. Remove all connections at the X209 Ground Junction.
3. Thoroughly clean all surfaces.
4. Reassemble connections.
5. Apply protective coating.

The X209 ground junction is located on the drivesside bulkhead. See images below.

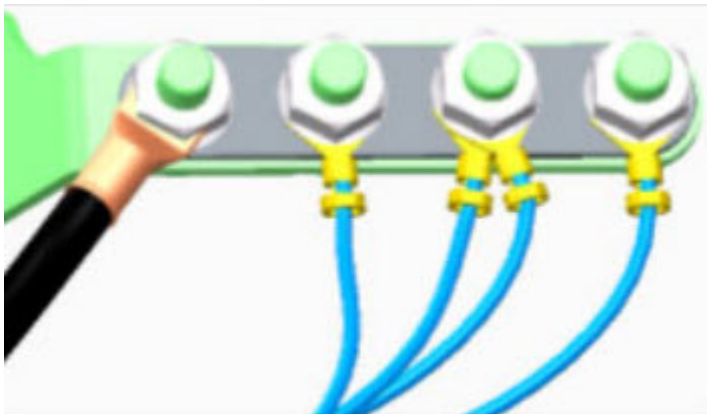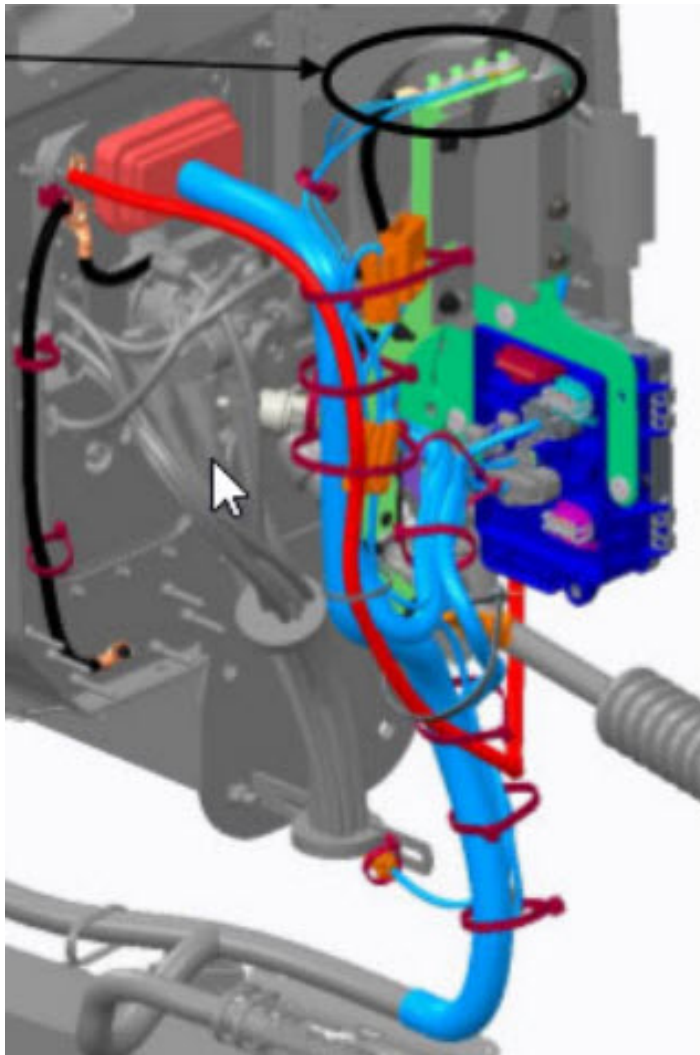



Tags

[x209](#)[u012100](#)[volvo](#)[mack](#)[ground junction](#)

Related links and attachments

No links or attachments available



Feedback

[Give feedback](#)

to help improve the content of this article