



GROUP	MODEL
ELE	2015-2016MY Sedona (YP)
NUMBER	DATE
245	July 2021

TECHNICAL SERVICE BULLETIN

SUBJECT: MULTI-FUNCTION SWITCH REPLACEMENT

This bulletin provides information regarding the replacement of multi-function switch Assembly associated with the 'Warranty Extension Program' (WTY022) on 2015-2016MY Sedona (YP) vehicles produced from July 21, 2014 through March 17, 2016. The multi-function switch assembly is the steering column-mounted stalk that controls headlamps and tail lamps, turn signals, and, if equipped, fog lamps. This warranty extension is to address any concerns with the functionality of the multi-function switch. If, at any time during the extended warranty coverage, the customer's vehicle exhibits issues with headlamps, tail lamps, turn signals, and/or fog lamps, dealers are to diagnose the multi-function switch assembly and, if necessary, to replace it at no cost to the customer. Follow the procedure outlined in this publication to replace the multi-function switch with a new one.

Note: Other normal wear/tear items may be listed as 'not covered under this warranty coverage'.




Replacement Procedure:

1. Replace the multi-function switch (A) by referring to the "Body Electrical Switch → Multifunction Switch → Repair procedures" in the applicable Shop Manual on KGIS.

ⓘ IMPORTANT

Be sure to reuse the two (2) multi-function switch retaining screws (B) when installing the new switch (A).

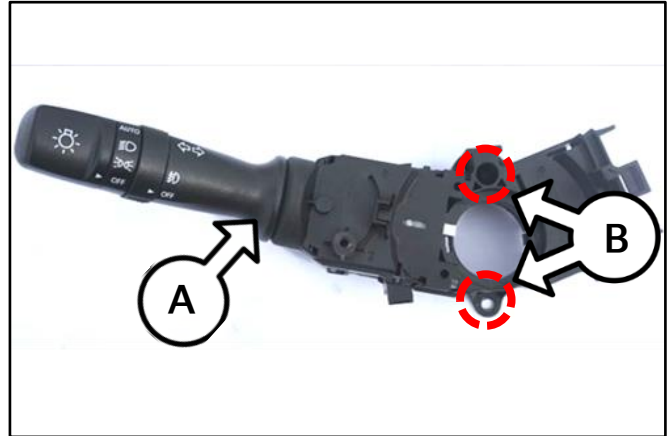

2. Confirm normal operation of the multi-function switch.

SUBJECT:

MULTI-FUNCTION SWITCH REPLACEMENT**AFFECTED VEHICLE RANGE:**

Model	Production Date Range
Sedona (YP)	July 21, 2014 to March 17, 2016

REQUIRED TOOL:

Tool Name	Figure	Comments
Generic Steering Wheel Removal		Locally sourced. This tool can be used in place of SST 09561 11001.

REQUIRED PART:

Part Name	Part Number	Figure	Qty.
Multi-Function Switch	93400 A9050FFF		1
	93400 A9550FFF		
	93400 A9750FFF		

WARRANTY INFORMATION:**N Code: B11 C Code: ZZ3**

Claim Type	Causal P/N	Qty.	Repair Description	Labor Op Code	Op Time	Replacement P/N	Qty.
W	93400 A9050	0	Multi-Function Switch Replacement	93410F00	0.6 M/H	93400 9050FFF or 93400 A9550FFF or 93400 A9750FFF	1

