



Service Bulletin

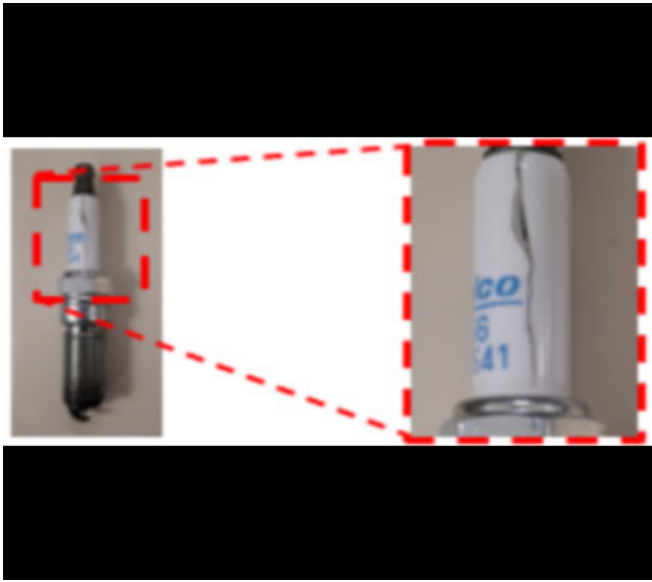
Bulletin No.: 21-NA-289

Date: December, 2021

TECHNICAL

Subject: Engine Misfire, Malfunction Indicator Lamp (MIL) Illuminated - DTC P0300 Set

Brand:	Model:	Model Year:		Breakpoint Date:		Engine: (1.4L, 1.5L)	Transmission:
		from	to	from	to		
Chevrolet	Equinox	2021	2021	April 21	July 21	LYX	
GMC	Terrain						

Involved Region or Country	North America, Middle East, Israel, Palestine, Argentina (Mercosur), Brazil (Mercosur), Colombia (West), Uruguay (West), Thailand (ASEAN)
Condition	Some customers may comment on one or more of the following conditions: <ul style="list-style-type: none"> • MIL illuminated • Engine misfire Technicians may find DTC P0300 set in the Engine Control Module (ECM).
Cause	 <p style="text-align: right;">5946470</p>
Correction	<p>This condition may be caused by a broken spark plug insulator.</p> <p>If you encounter a vehicle with an engine misfire or engine misfire related DTC, perform the following:</p> <p>⇒ Remove the spark plugs from the engine and inspect for a broken outer ceramic insulator.</p>

Service Procedure

Refer to *Gas Engine Ignition Spark Plug Inspection* and *Gas Engine Ignition Spark Plug Replacement* in SI.

Warranty Information

For vehicles repaired under warranty, use:

Labor Operation	Description	Labor Time
4020061	Gas Engine Ignition Spark Plug Replacement - Multiple	Use Published Labor Operation Time

Version	1
Modified	Released December 15, 2021

Additional SI Keywords: P0301, P0302, P0303, P0304

