



STAR ONLINE PUBLICATION



Case Number: S2108000192

Release Date: August 2021



Symptom/Vehicle Issue: MIL Lamp On, Vehicles Engine Runs Rough, Poor Performance

Customer Complaint/Technician Observation: Owner complains the MIL (Malfunction Indicator Lamp) is on. Technician observed the vehicle is setting DTC P0353 Ignition Coil Three Primary Circuit as stored or active.

Repair Procedure: Inspect the number 3 coil connector location as highlighted, secure the connector at the coil using the push, pull, push method. No parts required.

PCM P0353 Stored - Ignition Coil 3 Circuit

D5206A, Ignition coil 3

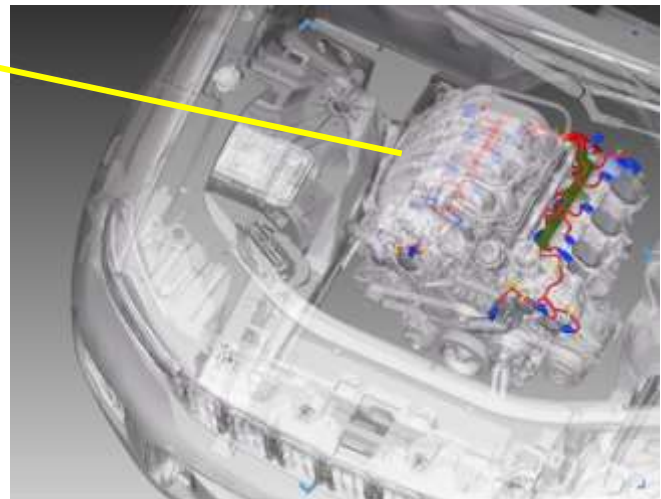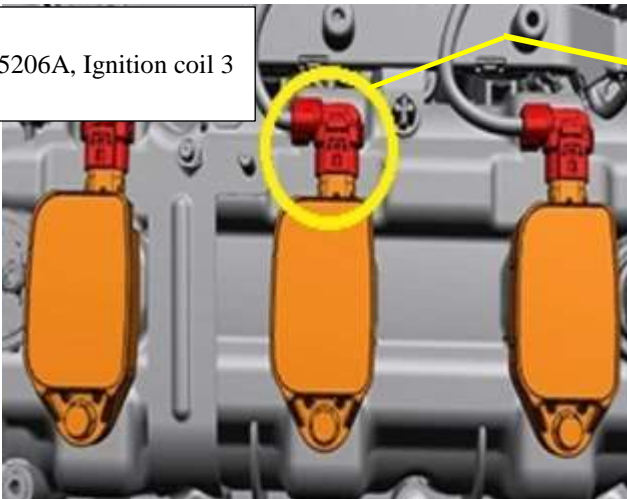

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

Contact STAR Center, or your Technical Assistance Center Via TechCONNECT or eCONTACT ticket if no solution is found