



STAR ONLINE PUBLICATION




Case Number: S2108000076

Release Date: 03/19/2021

Symptom/Vehicle Issue: CEL Check Engine Lamp On, DTC P00F9 Supercharger-Turbocharger Outlet Pressure Sensor Range Performance

Customer Complaint/Technician Observation: Owner complains the CEL lamp is on. Technician observed PCM DTC P00F9 – Supercharger/Turbocharger Outlet Pressure Sensor Range Performance.

Repair Procedure: Inspect the # 2 Outlet TMAP Sensor position and secure the connector as needed. Inspect others to complete, no parts required.

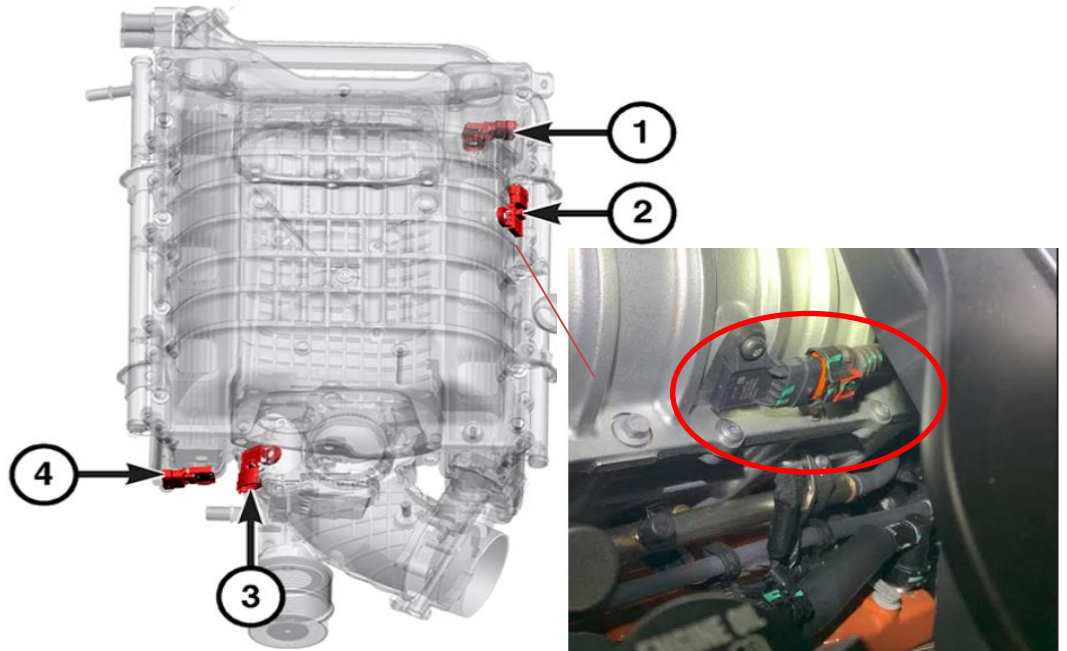

Intake TMAP Sensors

(1) Bank 1 TMAP Sensor	(3) Supercharger Inlet TMAP Sensor
(2) Supercharger Outlet TMAP Sensor	(4) Bank 2 TMAP Sensor
Inlet Air Temperature (IAT) not shown	

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

Contact STAR Center, or your Technical Assistance Center Via TechCONNECT or eCONTACT ticket if no solution is found