



STAR ONLINE PUBLICATION



Case Number: S2121000006

Release Date: April 2021

Symptom/Vehicle Issue: Transmission Will Not Engage Into Gear

Discussion: Some customers may experience their transmission will not engage into gear when shifting out of park. Upon further investigation a technician may find one of more of the following DTCs:

- P0810 – Clutch Position Error
- C2222 – Improper Power Event Information
- P0919 – Gear Shift Position Control Error
- B222D – ECU Unable to Configure/Configuration Not Learned
- U0418 – Implausible Data Received from Brake System Control Module
- U0402 – Implausible Data Received from TCM
- U0415 – Invalid Data Received from Anti-Lock Brake System
- U148D – Implausible Data Received from Forward Facing Camera

If you receive a vehicle with the above condition, inspect for corrosion in the XY105 connector and repair as necessary. Please see ([Figure 1 & 2](#)).

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

Contact STAR Center, or your Technical Assistance Center Via TechCONNECT or eCONTACT ticket if no solution is found



STAR ONLINE PUBLICATION



Figure 1

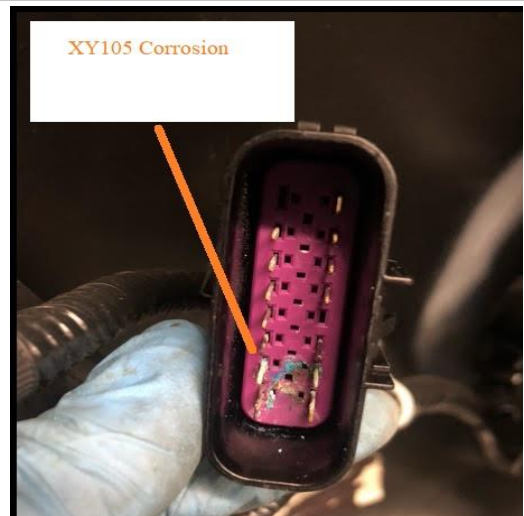


Figure 2

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

Contact STAR Center, or your Technical Assistance Center Via TechCONNECT or eCONTACT ticket if no solution is found