



Diagnostic Trouble Code (DTC, Fault Code) MID 140 PSID 210 FMI 12, Faulty Unit or Component Present On DTC Readout; Vehicle Operation Not Affected: No Physical Symptoms Or Warning Lights In Instrument Cluster - Model Year 2018




> Internal Content

For vehicles exhibiting this issue:

1. Connect to the vehicle with Premium Tech Tool (PTT).
2. Run Operation 1700-08-03-39 Program Electronic Control Unit, located under the **Program** tab in PTT.
3. Select **Information Display (MID 140)** from the list of ECUs.
4. Make sure **Update Electronic Control Unit with latest software** is selected. Click the **Program** button in the lower right-hand corner.
5. Allow the operation to complete. Click **Exit** in the lower right-hand corner of the screen.

NOTE: This software update will also add a new function to the display. Following the update, the Brake Air Low icon will now appear in the information display when the correct conditions are met. The new icon can be seen below.

- **This function is not related to the symptoms described for this Solution.** Driver or customer reports of this new screen may be received after performing the update, and this note is meant to advise that this is a normal function of the new software.

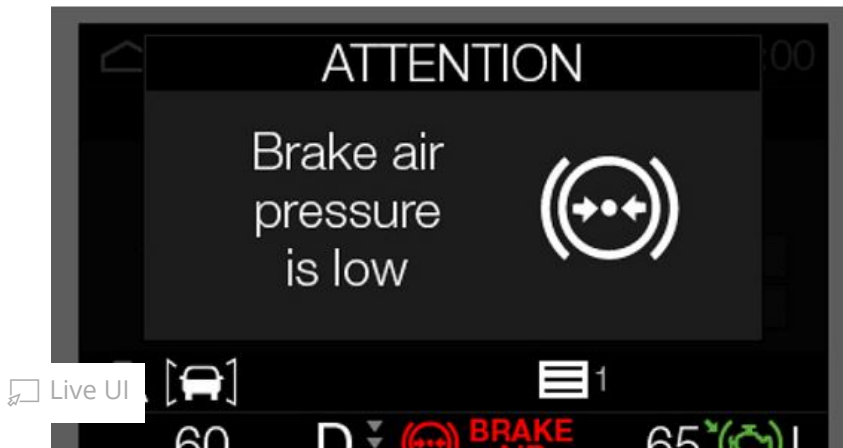

 Tags

[k53357197](#)

[mid 140 psid 210 fmi 12](#)

[mack](#)

[volvo](#)

Related links and attachments

No links or attachments available

 **Feedback**

[Give feedback](#)

to help improve the content of this article