



Technical Service Bulletin

69 Noises from front seat belt buckle/seat cover

69 22 76 2065720/1 January 8, 2022.

Model(s)	Year	VIN Range	Vehicle-Specific Equipment
A3, A3 Cabriolet, and S3	2015 – 2016	All	Not Applicable

Condition

Customer states:

- Noises from the area of the front seat belt buckle and the seat cover.

Technical Background

In some instances, depending on the position of the driver's or front passenger side seat, noises can be generated between the belt buckle and the seat cover.

Production Solution

Not applicable.

Service

- Attach a felt mat with part number 8V0 858 541 to both front belt buckles (Figure 1).



Technical Service Bulletin

2. When attaching the felt mat, it is essential to ensure that the text field in the center of the belt buckle stays uncovered and the lower edges are covered with the felt (Figure 1).

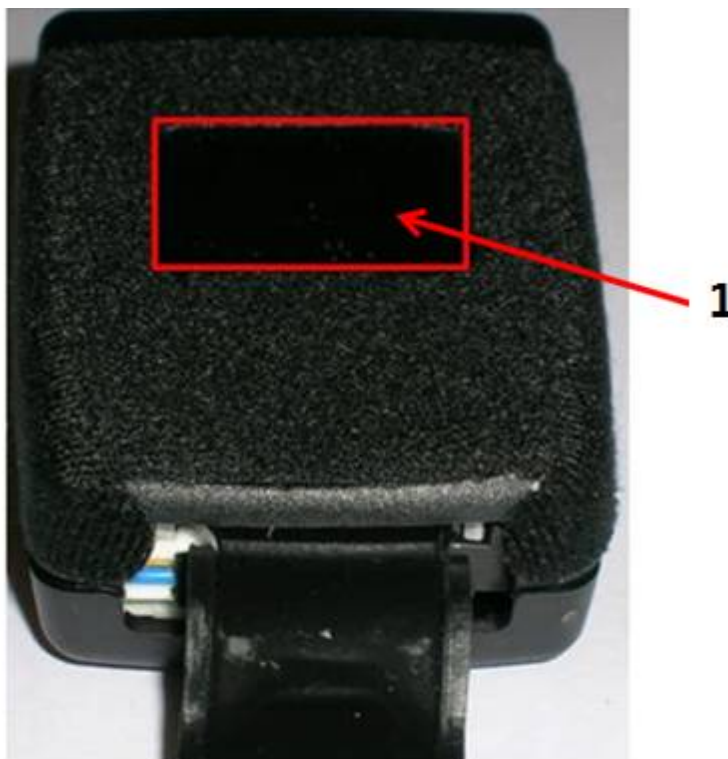


Figure 1. Felt mat 8V0 858 541 attached to belt buckle.

Warranty

Claim Type:	<ul style="list-style-type: none">• 110 up to 48 Months/50,000 Miles.
-------------	---



Technical Service Bulletin

	<ul style="list-style-type: none">• G10 for CPO Covered Vehicles – Verify Owner.• If the vehicle is outside any warranty, this Technical Service Bulletin is informational only.		
Service Number:	6924		
Damage Code:	0018		
Labor Operations:	Modify 2 seat belt buckles	6924 4999	20 TU
Diagnostic Time:	GFF	No allowance	0 TU
	Road test prior to the service procedure	No allowance	0 TU
	Road test after the service procedure	No allowance	0 TU
Claim Comment:	As per TSB #2065720/1		

All warranty claims submitted for payment must be in accordance with the *Audi Warranty Policies and Procedures Manual*. Claims are subject to review or audit by Audi Warranty.

Required Parts and Tools

Always check with your Parts Department and/or ETKA for the latest information and parts bulletins.	
Part Description	Quantity
Fasteners, Bolts, Nuts, and Screws as needed per the Repair Manual	See ETKA/ELSA
Felt mat	02

Additional Information

All parts and service references provided in this TSB (2065720) are subject to change and/or removal.

©2022 Audi of America, Inc. All rights reserved. The information contained in this document is based on the latest information available at the time of printing and is subject to the copyright and other intellectual property rights of



Technical Service Bulletin

Audi of America, Inc., its affiliated companies, and its licensors. All rights are reserved to make changes at any time without notice. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, nor may these materials be modified or reposted to other sites without the prior expressed written permission of the publisher.