



SERVICE BULLETIN

Classification: BT22-002	Reference: NTB22-009	Date: February 14, 2022
-----------------------------	-------------------------	----------------------------


DOOR LOCK SERVICE INFORMATION

APPLIED VEHICLES: 2022 Frontier (D41)

SERVICE INFORMATION

If either the front driver (LH) side or front passenger (RH) side door lock is replaced and does not already have foam applied to the lock knob cable, as shown in Figure 1, self adhesive EPDM semi-closed cell foam (foam) must be applied.

- Apply 130 mm of foam to the lock side
- Apply 60 mm of foam to the handle side

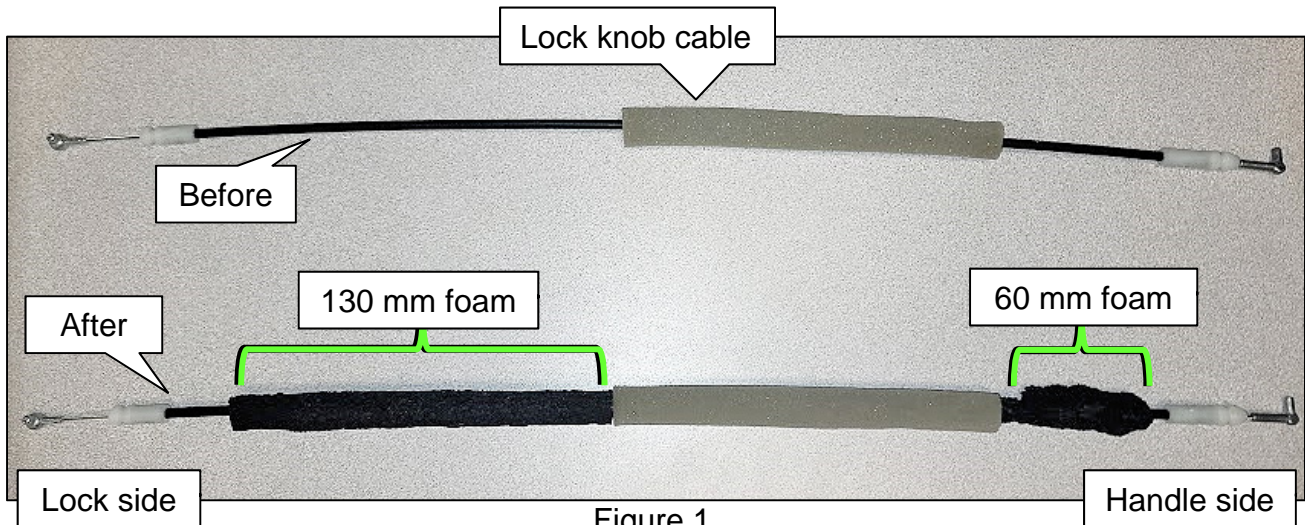

PARTS INFORMATION

DESCRIPTION	PART NUMBER	QUANTITY
5 mm EPDM Semi Closed Cell Foam (Squeak and Rattle Kit)	J-50397-1	As Needed

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. **NOTE:** If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

AMENDMENT HISTORY

PUBLISHED DATE	REFERENCE	DESCRIPTION
February 14, 2022	NTB22-009	Original bulletin published

