

# McLAREN 765LT – REMAINING PARKING DAYS DISPLAY INCORRECT

|                            |                                                                                                                                                 |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Bulletin type:</b>      | Service Campaign                                                                                                                                |
| <b>Reference number:</b>   | N/A                                                                                                                                             |
| <b>Campaign reference:</b> | SCB 14 M 005                                                                                                                                    |
| <b>Attention:</b>          | Retailer Aftersales Managers, Retailer Service Managers, Retailer Service Advisors,<br>Retailer Technicians                                     |
| <b>Affected vehicles:</b>  | McLaren 765LT                                                                                                                                   |
| <b>Situation:</b>          | The remaining parking days displayed in the instrument cluster is incorrect                                                                     |
| <b>Procedure:</b>          | Action affected vehicles during next Retailer visit. Please refer to the information<br>outlined in this document to complete the required work |
| <b>Date:</b>               | 31 <sup>st</sup> March 2022                                                                                                                     |

This bulletin will cover:

- 
1. Overview
  2. Procedure
  3. Warranty Information
  4. Affected Vehicles

## 1. Overview

Through continuous product quality monitoring, it has been identified that on certain McLaren 765LT vehicles the number of parking days remaining displayed in the instrument cluster is incorrect. Therefore, a McLaren Diagnostic System (MDS) Sequence has been released in order to re-configure this feature.



Image 1 – Example of remaining parking days display

## 2. Procedure

To complete this campaign please carry out the steps outlined below.

- Execute MDS Quiescent Current Configuration Sequence:

### Step 1

Connect the Deutronic charger to the vehicle

### Step 2

Turn the ignition ON, engine OFF

### Step 3

Connect the MDS to the vehicle and carry out a scan

### Step 4

Select the BC module and then select the Sequences tab

### Step 5

Select the sequence named **Quiescent Current Configuration** from the list

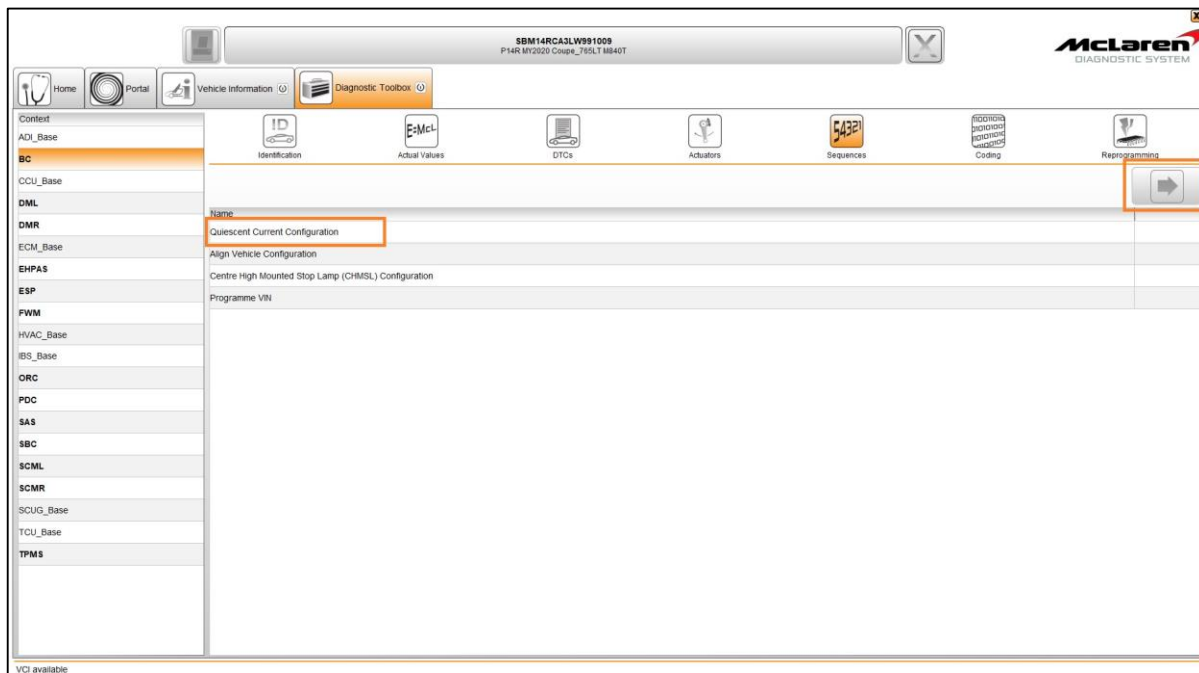


Image 2 – Quiescent Current Configuration Sequence location in the MDS

#### Step 6

Ensure the preconditions displayed on-screen are met and click '**OK**' to execute the sequence

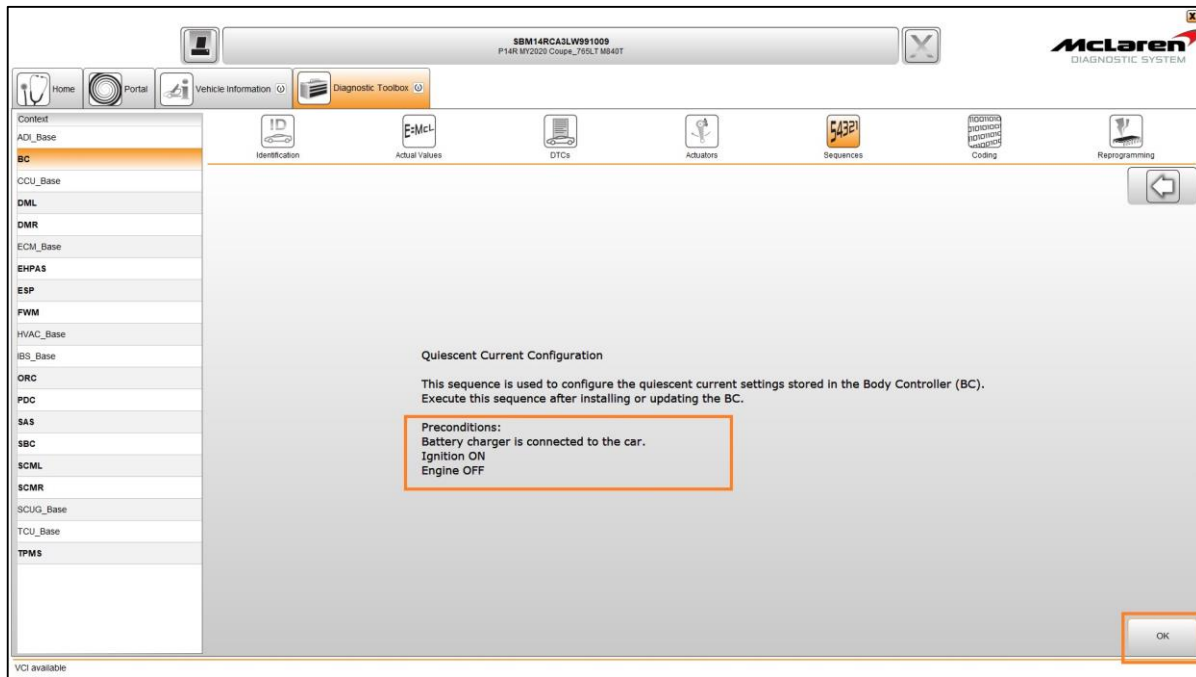


Image 3 – Sequence Preconditions

## Step 7

Monitor the MDS screen while the sequence is in progress – do not interrupt the operation

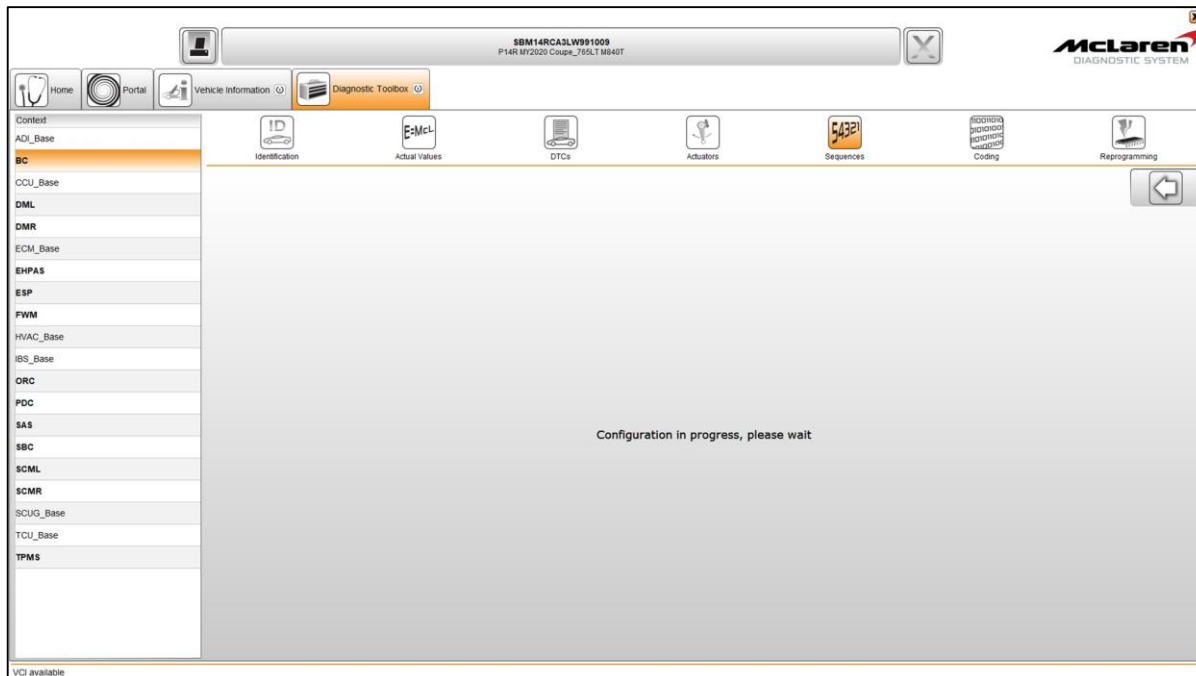


Image 4 – Sequence in progress

## Step 8

Upon completion of the configuration, the MDS screen will display **‘Operation Successful’** to confirm the operation was completed successfully

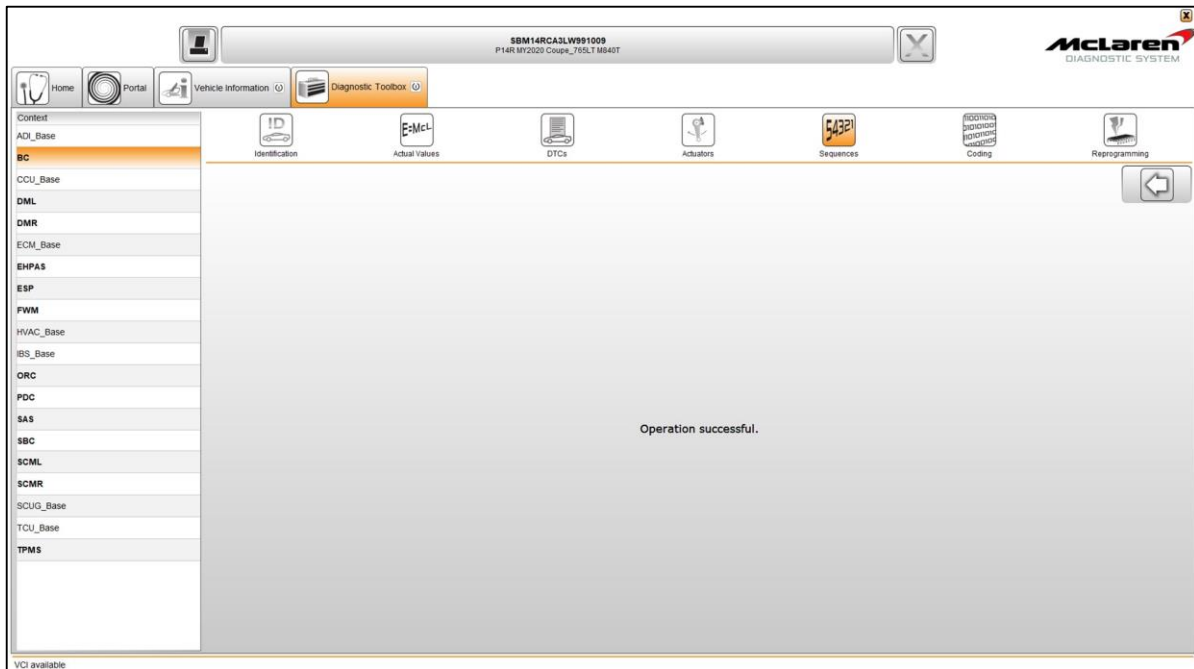


Image 5 – Successful completion of the Quiescent Current Configuration Sequence

#### Step 9

If the Sequence fails to complete successfully, cycle the ignition, re-scan the vehicle and repeat Steps 4 to 8

**Care Point:** You must ensure that the message ‘Operation Successful’ has been displayed on the MDS screen

**Care Point:** If, after a reasonable number of attempts, the MDS is unable to successfully complete the Sequence and display the ‘Operation Successful’ message please raise a Technical Request (TR) to the Aftersales Technical Support team following the TR submission guide.

— End of Procedure

### 3. Warranty Information

Submit the pre-approved Warranty claim to the McLaren Warranty department following completion of the work.

| DESCRIPTION                  | QUANTITY (HOURS) |
|------------------------------|------------------|
| McLaren Standard Labour Time | 0.20             |

**Care Point:** The work instruction and related labour time may be different from work instructions in the Service Information System (SIS). When you do this work you must refer only to the advice in this bulletin.

### 4. Affected Vehicles

Affected vehicles will be flagged in the Retailer Portal when next opening a Workshop Visit related to the vehicle.

Your Regional Aftersales Manager will contact you with a list of affected vehicles.

Best regards,

If you have any questions, please speak to your Regional Aftersales Manager.

The information contained in McLaren bulletins is for internal use only by McLaren Authorised Retailers and must not be published on external websites or social media forums etc.

All bulletins (Information/Campaign/Recall) issued by McLaren Automotive Limited ("McLaren") are intended only for use by technicians who have attended McLaren technical training courses. McLaren trained technicians have the equipment, tools, safety instructions and the know how to perform the job properly and safely. McLaren bulletins are written to inform McLaren technicians of conditions that may occur on some McLaren vehicles, or to provide information that could assist diagnosing a McLaren vehicle.