

Classification:

Reference:

 COPYRIGHT© NISSAN NORTH AMERICA, INC.
 Date:

EL22-006

ITB22-010

March 15, 2022

SERVICE INFORMATION FOR BRAKE SWITCH ADJUSTMENT FOR DTC C1142 AND/OR C1116 STORED

APPLIED VEHICLES: 2022 QX60 (L51)

SERVICE INFORMATION

DTC C1142 (PRESS SEN CIRCUIT) and/or C1116 (STOP LAMP SW) may be stored if the Stop Lamp Switch and/or the Brake Pedal Position Switch are out of adjustment.

Before replacing any components for DTCs C1142 (PRESS SEN CIRCUIT) and/or C1116 (STOP LAMP SW), stored as past or current, confirm that the Stop Lamp Switch and the Brake Pedal Position Switch are properly adjusted.

If either the Stop Lamp Switch and/or the Brake Pedal Position Switch are found to be out of adjustment, adjust them as per the ESM, and then clear the DTCs and perform DTC confirmation.

- Refer to the ESM: **BRAKES > BRAKE SYSTEM > PERIODIC MAINTENANCE > BRAKE PEDAL > Adjustment**

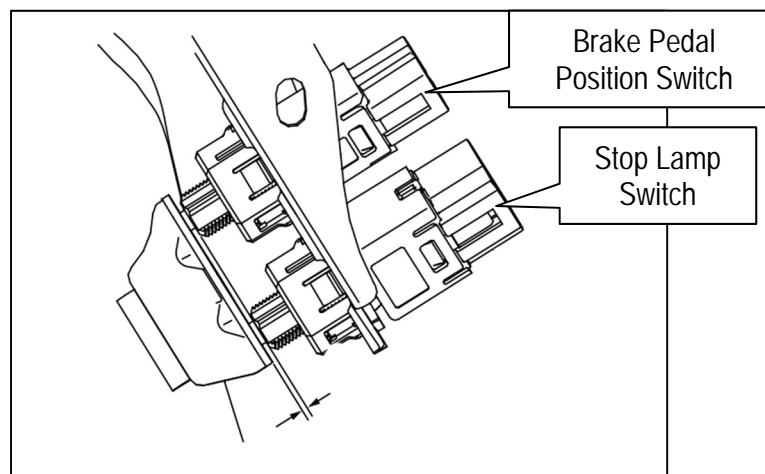


Figure 1

Infiniti Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. **NOTE:** If you believe that a described condition may apply to a particular vehicle, **DO NOT** assume that it does. See your Infiniti retailer to determine if this applies to your vehicle.

AMENDMENT HISTORY

PUBLISHED DATE	REFERENCE	DESCRIPTION
March 15, 2022	ITB22-010	Original bulletin published

