



SERVICE BULLETIN

Classification: EL22-005	Reference: NTB22-020	Date: March 15, 2022
-----------------------------	-------------------------	-------------------------

SERVICE INFORMATION FOR BRAKE SWITCH ADJUSTMENT FOR DTC C1142 AND/OR C1116 STORED

APPLIED VEHICLES: 2019-2022 Altima (L34)
2022 Frontier (D41)
2019-2022 Murano (Z52)
2022 Pathfinder (R53)
2019-2022 Titan/Titan XD (A61)

SERVICE INFORMATION

DTC **C1142 (PRESS SEN CIRCUIT)** and/or **C1116 (STOP LAMP SW)** may be stored if the Stop Lamp Switch and/or the Brake Pedal Position Switch are out of adjustment.

Before replacing any components for DTCs **C1142 (PRESS SEN CIRCUIT)** and/or **C1116 (STOP LAMP SW)**, stored as past or current, confirm that the Stop Lamp Switch and the Brake Pedal Position Switch are properly adjusted.

If either the Stop Lamp Switch and/or the Brake Pedal Position Switch are found to be out of adjustment, adjust them as per the ESM, and then clear the DTCs and perform DTC confirmation.

- Refer to the ESM: **BRAKES > BRAKE SYSTEM > PERIODIC MAINTENANCE > BRAKE PEDAL > Adjustment**

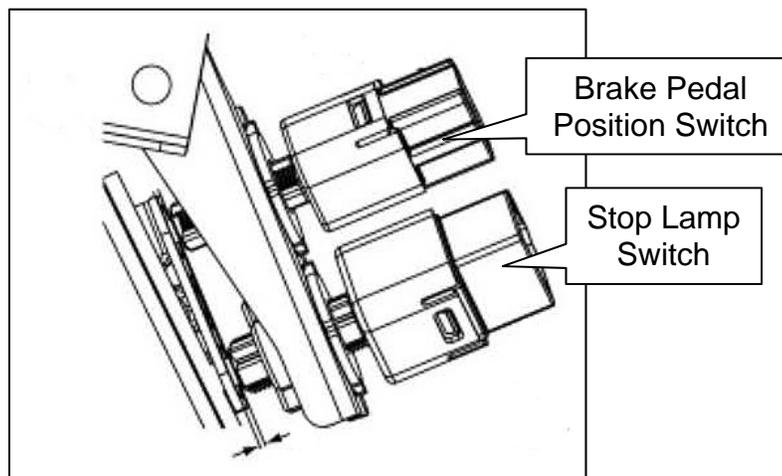


Figure 1

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. **NOTE:** If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

AMENDMENT HISTORY

PUBLISHED DATE	REFERENCE	DESCRIPTION
March 15, 2022	NTB22-020	Original bulletin published

