

**WKA9 - Retrofitting Warning Sticker on Emergency Release Handle for Slide/Tilt Sunroof (Stop Delivery)**

Vehicle Type: **911 Carrera S (992)/911 Carrera 4S (992)**

Model Year: **2020**

Equipment: Electric slide/tilt sunroof (I-no. 3FD)  
**or**  
 Electric slide/tilt sunroof (glass) (I-no. 3FE)

Subject: **Emergency operation of slide/tilt sunroof**

Information: **The sunroof position is not detected by the control unit following emergency operation of the slide/tilt sunroof on the affected vehicles. As a result, the rear spoiler position is not adapted to the changed aerodynamics with respect to the sunroof position.**

This can change the aerodynamics of the vehicle whilst driving, thereby overloading the tyres on the rear axle.

Remedial Action: Retrofit warning sticker on the emergency release handle for the slide/tilt sunroof.

Affected Vehicles: Only the vehicles assigned to the campaign (see also PIWIS Vehicle information).


**Parts required**

Parts Info:	Order No.:	Designation	Qty.
	992010500	⇒ Warning sticker for emergency release handle	1 ea.

**Retrofit warning sticker on the emergency release handle for slide/tilt sunroof**


Work Procedure: 1 Open front lid.

- 2 Remove plastic cover ⇒ *Emergency release handle -1-* and take emergency release handle ⇒ *Emergency release handle -2-* out of the tool kit.

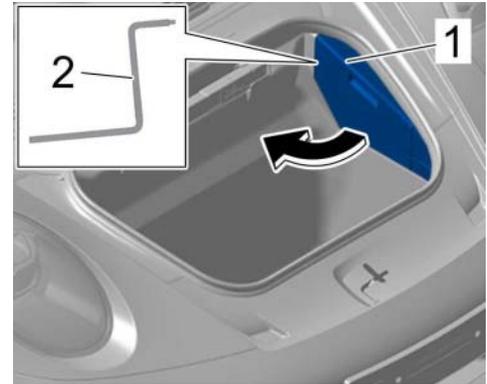

*Emergency release handle*

- 3 Affix warning sticker ⇒ *Warning sticker for emergency release handle -1-* on the emergency release handle ⇒ *Warning sticker for emergency release handle -2-*.
- 4 Put emergency release handle in the tool kit and attach plastic cover.
- 5 Close front lid.

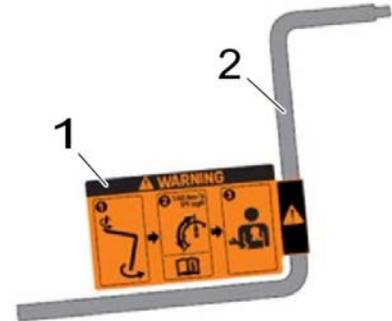

*Warning sticker for emergency release handle*

This campaign **does not need to be entered** in the **Warranty and Maintenance booklet**.

## Warranty processing

Scope: **Retrofit warning sticker on the emergency release handle for slide/tilt sunroof**

### Working time:

Retrofitting warning sticker on emergency release handle for slide/tilt sunroof

Labor time: **9 TU**

Includes: Opening and closing front lid  
Removing and attaching plastic cover

### Parts required:

992010500 Warning sticker for emergency release handle 1 ea.

⇒ **Damage Code WKA9 066 000 1**

**Important Notice:** Technical Bulletins issued by Porsche Cars North America, Inc. are intended only for use by professional automotive technicians who have attended Porsche service training courses. They are written to inform those technicians of conditions that may occur on some Porsche vehicles, or to provide information that could assist in the proper servicing of a vehicle. Porsche special tools may be necessary in order to perform certain operations identified in these bulletins. Use of tools and procedures other than those Porsche recommends in these bulletins may be detrimental to the safe operation of your vehicle, and may endanger the people working on it. Properly trained Porsche technicians have the equipment, tools, safety instructions, and know-how to do the job properly and safely. Part numbers listed in these bulletins are for reference only. The work procedures updated electronically in the Porsche PIWIS diagnostic and testing device take precedence and, in the event of a discrepancy, the work procedures in the PIWIS Tester are the ones that must be followed.

© 2022 Porsche Cars North America, Inc.