

## ServiceNews Article


September 2022 A22090A Version 1

## **Clarity FCV Sub Tank Harness Rodent Damage**


## **AFFECTED VEHICLES**

Year	Model	Trim Level
2017–2020	Clarity FCV	ALL

In the event you experience a sub tank wire harness rodent damage on the 2017–2020 Clarity FCV, after repairing / replacing the wire harness, wrap the areas shown below with **RODENT DETERRENT TAPE, P/N 4019-2317.** 

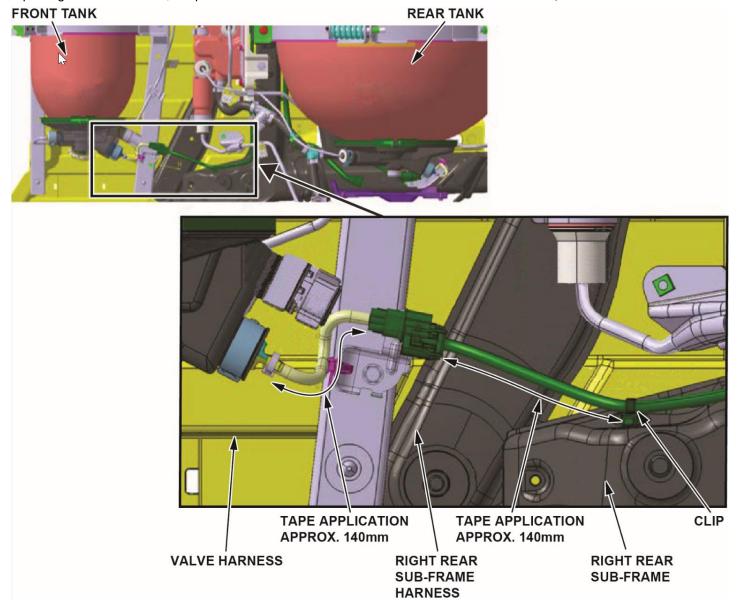

After repairing or replacing the harness, wrap some of that tape around the affected area. It has **capsaicin**. This should keep any critters from causing future problems.

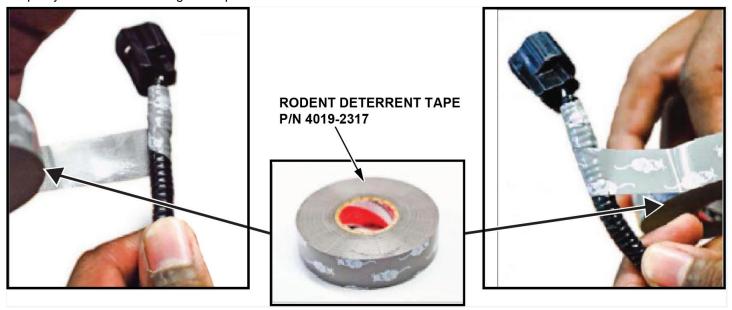

When wrapping the harness, use the method we refer to as half-wrapping. Each time you wrap the tape around the harness, overlap the layer you just did by half the width of the tape.

END