



# TECHNICAL SERVICE BULLETIN

Classification: PD22-001	Reference: NTB22-087	Date: September 28, 2022
-----------------------------	-------------------------	-----------------------------

## NOISE AND/OR VIBRATION FROM FRONT OR REAR PROPELLER SHAFT

**APPLIED VEHICLES:** 2016-2021 Frontier (D40)  
2022-2023 Frontier (D41)  
2016-2021 NV (F80)  
2016-2023 Titan/Titan XD (A61)

### SERVICE INFORMATION

If you confirm abnormal noise and/or vibration is coming from the front or rear propeller shaft of an **APPLIED VEHICLE**, inspect the propeller shaft journals (U-Joints) for binding and/or abnormal noise before replacing the propeller shaft.

If binding and/or abnormal noise is confirmed from the propeller shaft U-Joints, replace the propeller shaft U-Joints. Refer to the ESM for the propeller shaft U-Joint replacement procedure.

**NOTE:** Replacement of the propeller shaft due to noise and/or vibration caused by the propeller shaft U-Joints may result in warranty charge back.

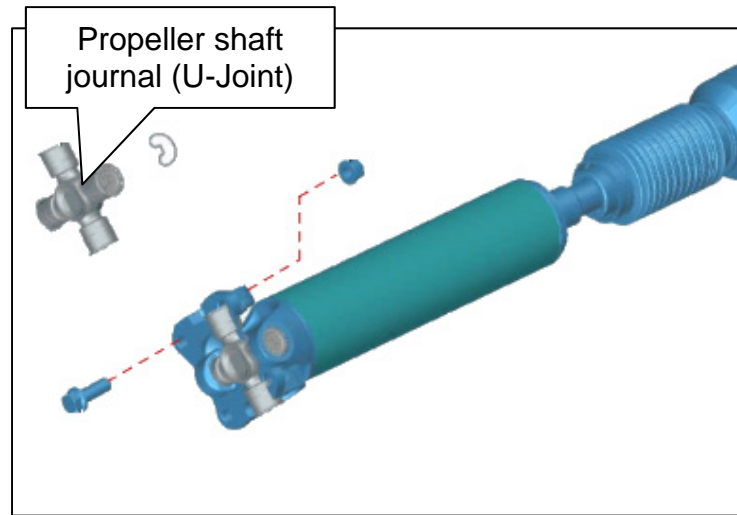


Figure 1

### AMENDMENT HISTORY

PUBLISHED DATE	REFERENCE	DESCRIPTION
September 28, 2022	NTB22-087	Original bulletin published

Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. **NOTE:** If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.