

Interference Between Refrigerant Line and Front Engine PTO (FEPTO)

M-870-001

(November 2007)

Valid for

All Mack MRU models with a FEPPTO built before July 23,2007

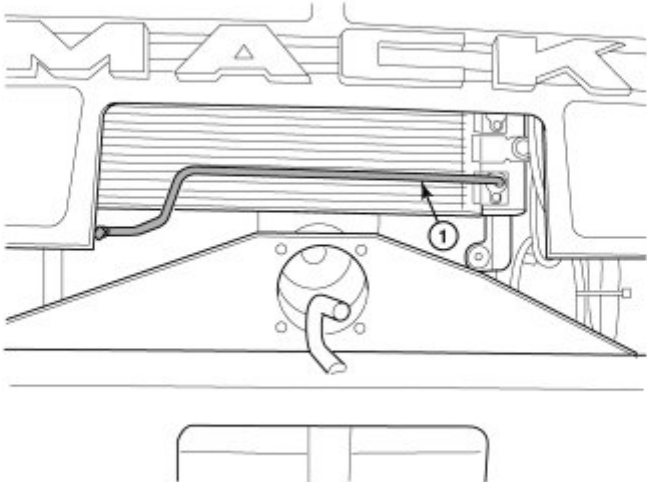
Case description

On MRU model chassis manufactured prior to July 23, 2007, and equipped with front engine power take-off (FEPTO), an interference condition exists between the air conditioning refrigerant line and the FEPTO drive shaft. To eliminate this condition, a revised refrigerant line (part number 212RD4111M) is available through the MACK Parts System. The revised refrigerant line is routed above the FEPTO opening in the radiator, thus eliminating any interference with the drive shaft.

Repair

Before installing the refrigerant line, refer to the Air Conditioning System Service Manual, 18-902, for information on evacuating the refrigerant before disconnecting any lines.

Required Parts

Refrigerant Line — MRU Models		
		
Part Number	Description	Quantity
212RD4111M	Refrigerant line	1

Issued by

Technical Service

Mack Trucks, Inc. engages in a continuous program of testing and evaluating to provide the best possible product. Mack Trucks, Inc., however, is not committed to, or liable for updating existing chassis.