POWERTRAIN

20-23MY Jaguar F-PACE, Land Rover Defender, Discovery, Range Rover, RR Sport, RR Velar

Customer reports coolant level low message on dash or a coolant leak.

Customer Voice:


- Technical Description:
- The Powertrain control module (PCM) will have codes for low coolant.

Message center displays "Coolant Low" warning - I6 3.0L and V8 4.4L

Status:

- Pressure test the coolant system as detailed in TOPIx section 303-03 Diagnosis and Testing Engine Cooling
- Inspect all cooling system components for leaks while performing pressure test diagnosis. (Expansion tank, turbo, thermostat housing, radiators and coolers, etc) If this is a repeat return for the customer, then conduct overnight pressure test and
- check level/pressure..
- If a fault is found, please raise an EPQR detailing the component replaced and exactly where the leak was found.
- If there is a loss of pressure but no leak is found, then contact TA quoting PTS_500 -Cooling.

SSM 75869 / 75870

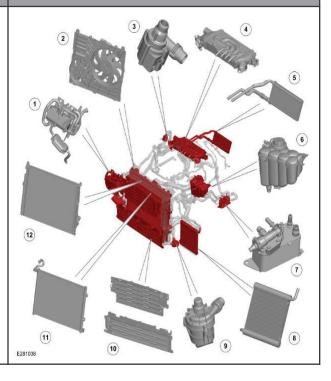

PRINTED COPIES ARE UNCONTROLLED

