



STAR ONLINE PUBLICATION




Case Number: S1923000015 Rev. B

Release Date: August 2022

Symptom/Vehicle Issue: Transmission Column Shifter Lever Feels Loose

Discussion: If the transmission column shift lever is verified to have looseness replace the shift lever and its fastener- 06509081AA. Do not reuse the shifter bolt. It has thread locker applied and is 1 time use. **NOTE:** New Fastener torque is 12 Ft/Lbs (16 nm)

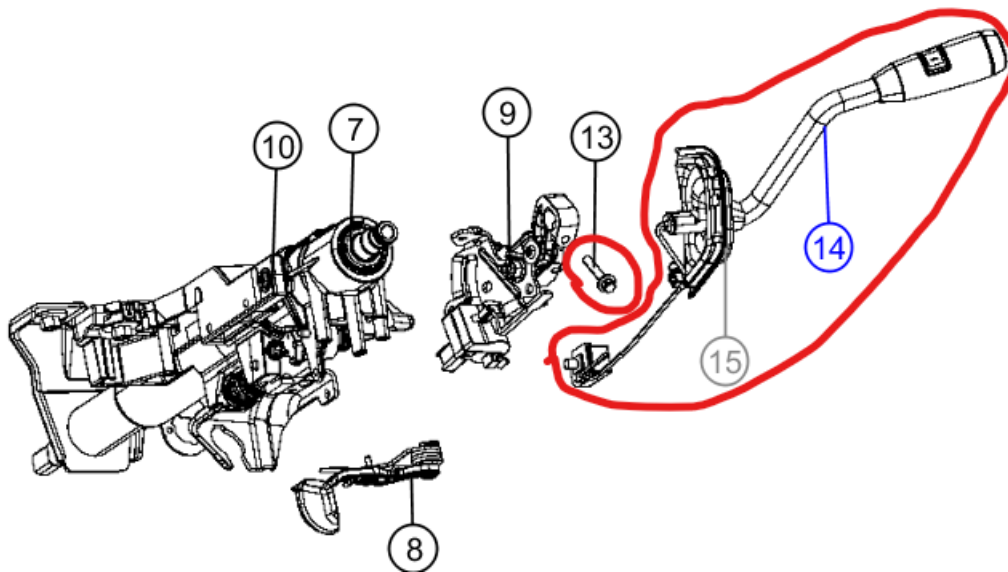

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

Contact STAR Center, or your Technical Assistance Center Via TechConnect, eCONTACT or Service Library entry if no solution is found.