



STAR ONLINE PUBLICATION




Case Number: S2323000008

Release Date: January 2023

Symptom/Vehicle Issue: Buzz Squeak Or Rattle Noise From Left Side Driver Door Area.

Customer Complaint/Technician Observation: Noise is coming from the left driver side while driving. Owner may complain of a noise from the floor or possibly in the lower door.

Discussion: Inspect the left side chassis harness and inline connector for proper routing and retention in frame clips. A chassis harness not fully installed in the mounting clips could be causing this noise. Repair or replace any missing or damaged clips and brackets.

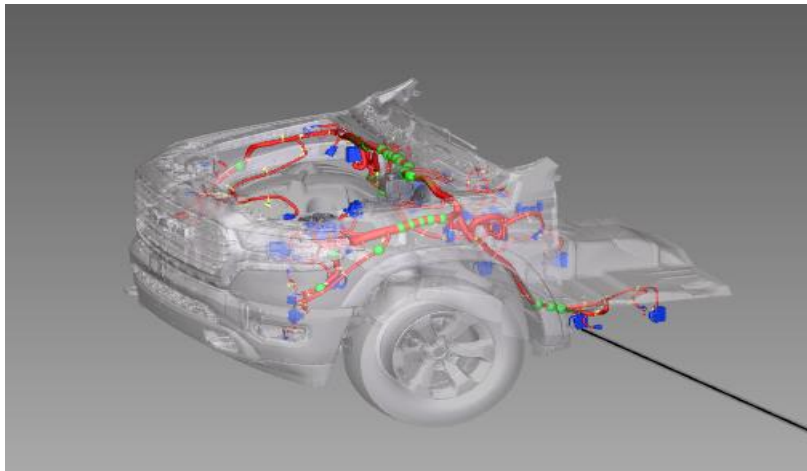

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

Contact STAR Center, or your Technical Assistance Center Via TechConnect, eCONTACT or Service Library entry if no solution is found.