



# Preliminary Information


## PIT5551J Amber Automatic Emergency Braking Disable Icon illuminated or During Start up Forward Collision System Reduced Displayed on DIC

Models

Brand:	Model:	Model Years:	VIN:		Engine:	Transmissions:
			from	to		
Buick	Enclave	2018 - 2023	All	All	All	All
Cadillac	ATS	2013 - 2019	All	All	All	All
Cadillac	CT6	2016 - 2020	All	All	All	All
Cadillac	CTS	2014 - 2019	All	All	All	All
Cadillac	Escalade Models	2016 - 2023	All	All	All	All
Cadillac	XTS	2018 - 2019	All	All	All	All
Cadillac	XT4	2019 - 2023	All	All	All	All
Cadillac	XT5	2017 - 2023	All	All	All	All
Cadillac	XT6	2020 - 2023	All	All	All	All
Chevrolet	Bolt EV	2017 - 2023	All	All	All	All
Chevrolet	Blazer	2019 - 2023	All	All	All	All
Chevrolet	Colorado	2015 - 2022	All	All	All	All
Chevrolet	Equinox	2018 - 2023	All	All	All	All
Chevrolet	Malibu	2016 - 2023	All	All	All	All
Chevrolet	Silverado	2017 - 2023	All	All	All	All
Chevrolet	Suburban	2017 - 2023	All	All	All	All
Chevrolet	Tahoe	2017 - 2023	All	All	All	All
Chevrolet	Traverse	2018 - 2023	All	All	All	All
Chevrolet	Volt	2016 - 2019	All	All	All	All
GMC	Acadia	2017 - 2023	All	All	All	All
GMC	Canyon	2015 - 2022	All	All	All	All
GMC	Hummer EV	2022 - 2023	All	All	All	All
GMC	Sierra	2017 - 2023	All	All	All	All
GMC	Terrain	2018 - 2023	All	All	All	All
GMC	Yukon Models	2017 - 2023	All	All	All	All


Involved Region or Country	North America
Additional Options (RPO)	With Forward Automatic Braking and/or Front Pedestrian Braking
Condition	Some owners may comment when they start their vehicle a "Forward Collision System Reduced" message is displayed on the DIC or there is an amber Automatic Emergency Braking Disable Icon illuminated in the IPC, examples shown below.

	Note: On some models the message displayed maybe "Automatic Collision Prep Reduced".
Cause	This message or amber ICON will display if the Forward Automatic Braking (FAB) or Front Pedestrian Braking (FPB) when equipped, has been set to the "Alert" setting. This setting disables most FAB or FPB functions.

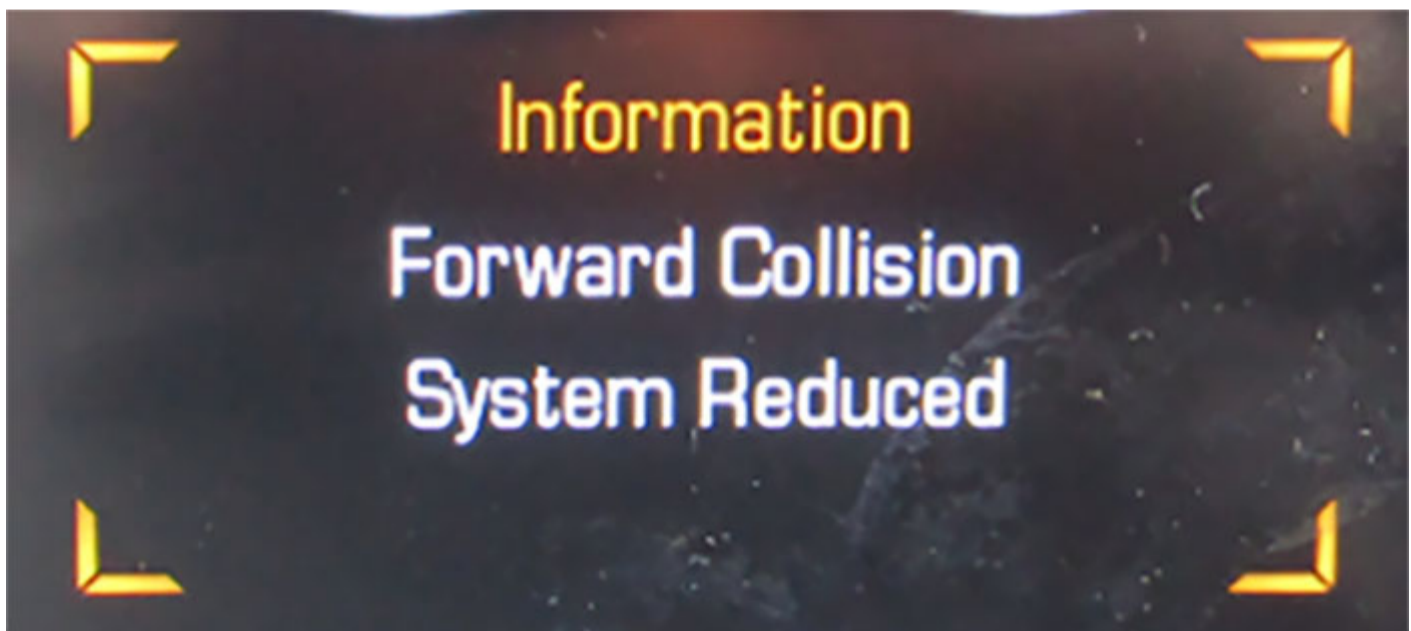

**Correction:**

This is normal when the FAB or FPB has been set to "Alert". There are three selections for the FAB or FPB system: OFF, Alert, Alert and Brake, example shown below. If the FAB and FPB are set to "Alert and Brake" the message or amber ICON will no longer be displayed.

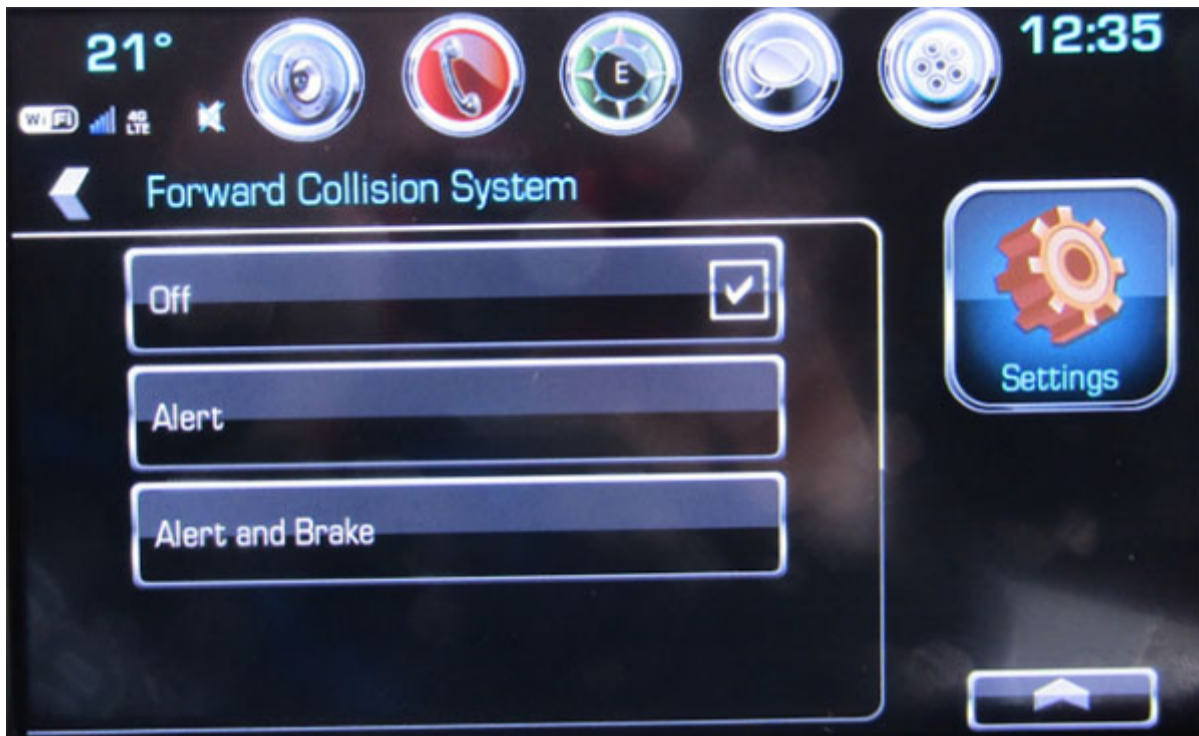

### Version History

Version	10
Modified	<p>03/14/2017 - Created on.</p> <p>07/05/2017 - To update Models and Condition section.</p> <p>10/23/2017 - To update the models, add the 2018 model year and add Note in the condition section</p> <p>05/11/2018 - To add the Cadillac 2018 XTS models</p> <p>05/15/2019 - Updated the models</p> <p>09/05/2019 - Updated Model Years.</p> <p>10/07/2020 - Update Model Years.</p> <p>10/11/2021 - Updated to add the Cadillac XT6</p> <p>12/12/2022 - Update to the Title/Models/Additional Options/Condition/Cause/ and Correction sections.</p> <p>02/24/2023 - Update the model list to add Hummer EV</p>



GENERAL MOTORS

© 2023 General Motors. All Rights Reserved.