



HYUNDAI

Technical Service Bulletin


GROUP	NUMBER
BODY ELECTRICAL	23-BE-008H
DATE	MODEL(S)
JULY 2023	Accent (HC)

SUBJECT: HORN ASSEMBLY WARRANTY EXTENSION (TXXR)
AND REPLACEMENT

Description: Certain 2018~19MY Accent (HC) vehicles may experience an inoperable horn that may be caused by internal contact alignment and corrosion.

Hyundai is extending the warranty coverage for the horn replacement to 10 years or 120,000 miles from the date of original retail delivery or date of first use (whichever occurs first) and is valid for original and subsequent owners.

This bulletin provides information on how to fix the inoperative horn.

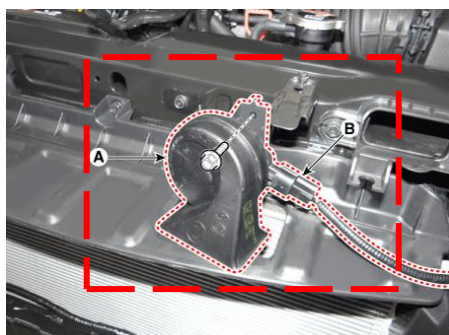

Applicable Vehicles (Certain):

- 2018-19MY Accent (HC) vehicles produced from 9/01/2017 – 05/27/2019.

Parts Information:

PART NAME	MODEL	PREVIOUS PART NUMBER	NEW PART NUMBER
HORN ASSY-HIGH PITCH	ACCENT (HC)	96611-H8200	96611-H9500

Warranty Information:

MODEL	OP. CODE	OPERATION	OP. TIME	CAUSAL PART	NATURE	CAUSE
ACCENT (HC)	230M01R0	HORN ASSY REPLACEMENT	0.5 M/H	96611-H8200	I11	ZZ3

Note 1: If the affected parts are still under factory warranty, submit as normal warranty. If the affected parts are out of factory warranty and within the extended warranty period, submit as a campaign claim type using the op codes listed above.

Circulate To: General Manager, Service Manager, Parts Manager, Warranty Manager, Service Advisors, Technicians, Body Shop Manager, Fleet Repair

Note 2: If a part that is not covered by this campaign is found in need of replacement while performing this campaign and the affected part is still under warranty, submit a separate claim using the same repair order. If the affected part is out of warranty, submit a Prior Approval request for goodwill consideration prior to performing the work.

NOTE 3: Refer to the latest Digital Documentation Policy for repair validation requirements.

NOTE 4: The incident parts are subject to callback through the normal Warranty Technical Center (WTC) parts return process. **Claim is subject to debit if the part is not returned.**

SERVICE PROCEDURE:

STUI



Refer to the latest Warranty Digital Documentation Policy for repair validation requirements.

1. Remove the front bumper assembly.

(Refer to “Body (Interior and Exterior) - Front Bumper”)
2. Remove the horn after disconnecting the horn connector (B) and loosening the mounting bolt.

(Refer to “Body Electrical System – Horn” for procedure)
3. Reinstall parts in reverse order of removal to complete service procedure.

