



15-23-01 - Head Gasket Leakage

Release date: 8/17/2023

Transaction No:

Condition

Applicable Vehicles						
Model(s)	Year	Eng. Code	Trans. Code	Engine Code From	Engine Code To	
Taos	2022 - 2023	1.5T (DNKA)	All	-	Engine Code DNKA 234 458	
Jetta	2022 - 2023	1.5T (DNKA)	All	-	Engine Code DNKA 234 458	

Revision Table							
Instance Number	Published Date	Version Number	Reason For Update				
2071245/1	08/17/2023	15-23-01	Original publication.				

Customer states coolant level low/leaking from engine area.

Technical Background

Original engine production head gasket design can lead to coolant leaks.

Production Solution

Improve head gasket design and coating as of Engine Number DNKA 234 458 July 27th 2023



Note:

This Technical Bulletin only covers cylinder head gasket replacement for the leaks described within. All other coolant leaks do not apply and will not be covered by this Technical Bulletin.

Service

If a coolant leak is found between the cylinder head and engine block, at the back of the engine below the turbo as indicated in Figure 1. and Figure 2., the head gasket must be replaced per Elsa Pro instructions.



15-23-01 - Head Gasket Leakage

Release date:

Transaction No:

8/17/2023

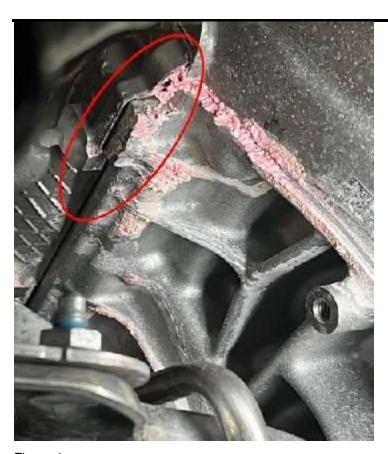


Figure 1.



Figure 2.

Warranty

Information only.

Technical Service Bulletin



15-23-01 - Head Gasket Leakage

Transaction No: 2071245/1

Release date: 8/17/2023

Required Parts and Tools

Always refer to ETKA for the latest part information.

Please review cylinder head gasket replacement in Elsa for single use parts.

Additional Information

All part and service references provided in this Technical Bulletin are subject to change and/or removal. Always check with your Parts Dept. and Repair Manuals for the latest information.