



STAR ONLINE PUBLICATION




Case Number: S2308000084

Release Date: July 2023

Symptom/Vehicle Issue: Malfunction Indicator Lamp (MIL), Stop Start Inoperative

Customer Complaint/Technician Observation: The owner complains of a MIL lamp that is on, and a stop-start feature that is not working. The technician observed Diagnostic Trouble Code (DTC) P0010 Bank 1 Intake Variable Valve Timing set in the Powertrain Control Module (PCM) as stored or active.

Repair Procedure: Inspect ground location G904, clean and secure the ground at the highlighted location. No parts are required, test the operation to complete.

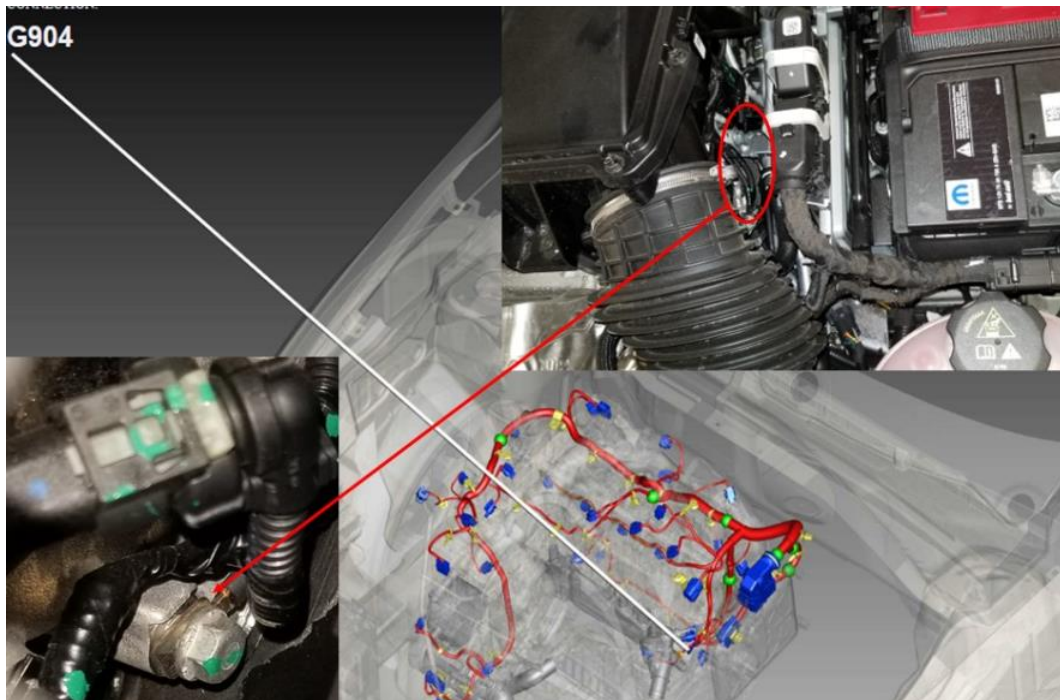

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

Contact STAR Center, or your Technical Assistance Center Via TechCONNECT or eCONTACT ticket if no solution is found