



Bulletin No.: PIT6053A
Published date: 10/2/2023

Preliminary Information

PIT6053A Diagnostic Tip - Frontview Grille Camera Washer Nozzle Leaking


Models

Brand:	Model:	Model Years:	VIN:		Engine:	Transmissions:
			from	to		
Chevrolet	Silverado 1500 New (RPO J22, VIN Digit 5 = A / D)	2022	All	All	All	All
Chevrolet	Silverado 1500	2023 - 2024	All	All	All	All
GMC	Sierra 1500 New (RPO J22, VIN Digit 5 = H / U)	2022	All	All	All	All
GMC	Sierra 1500	2023 - 2024	All	All	All	All

Involved Region or Country	North America
Additional Options (RPO)	UV2
Condition	Some customers may comment that the Frontview Camera Washer Nozzle is leaking washer fluid.
Cause	Service Information or the EPC/parts catalog does not show that there is a one way check valve built into the windshield washer hose that connects to the washer pump. This check valve is to prevent washer fluid from leaking.

Correction:

If no other root cause is found, then the check valve is included with the windshield washer hose that connects to the washer pump (#1 below) and replace as necessary.

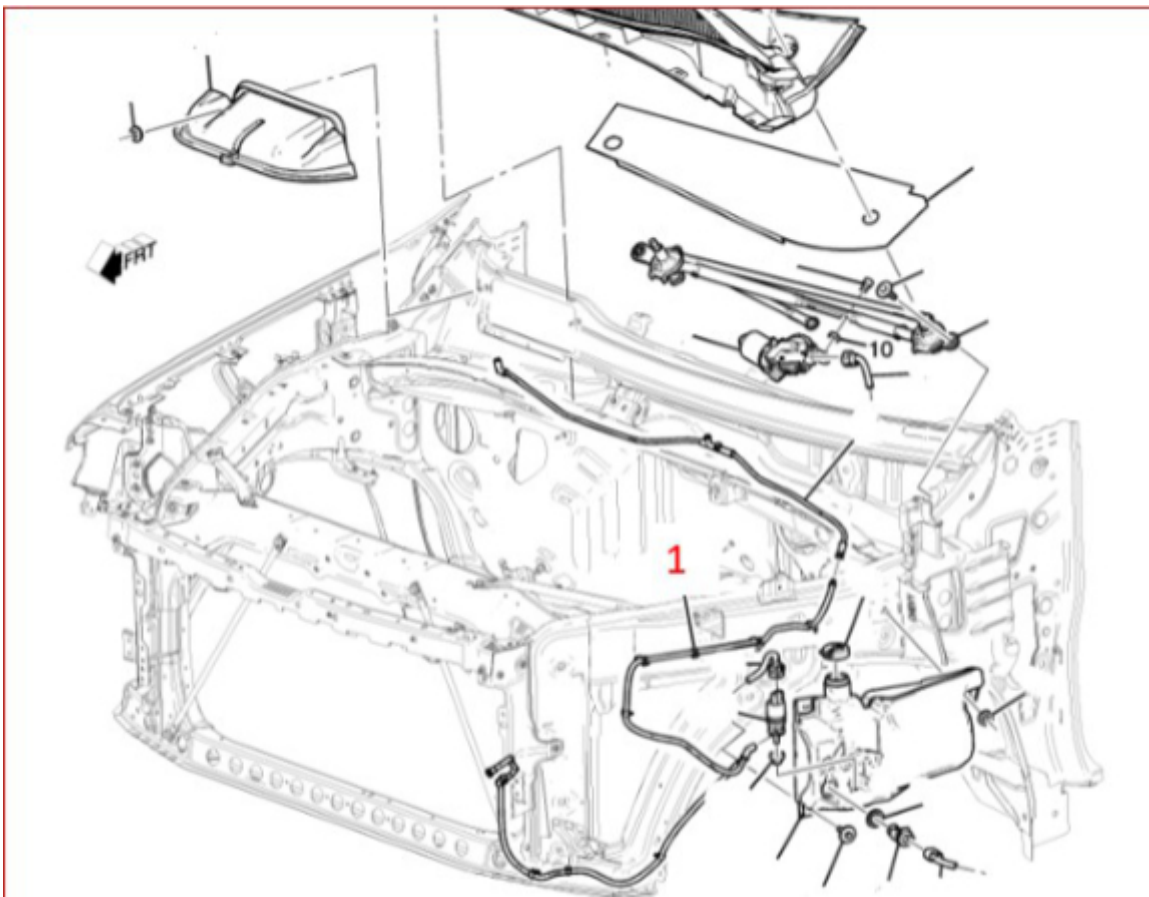

Version History

Version	2
Modified	08/25/2023 - Created on. 10/02/2023 - Added Model year and updated correction information.



© 2023 General Motors. All Rights Reserved.