



# Technical Service Bulletin

## 91 MIB3: wrong-way driver warning in MMI

91 24 98 2073627/1 April 8, 2024.

Model(s)	Year	VIN Range	Vehicle-Specific Equipment
A4, A4 allroad, S4, A5, A5 Cabriolet, A5 Sportback, S5, S5 Cabriolet, S5 Sportback, RS 5, and RS 5 Sportback	2020 - 2024	All	Not Applicable
A6, A6 allroad, S6, RS 6 Avant, A7, S7, RS 7, A8, S8, Q5, Q5 e quattro, Q5 Sportback, SQ5, SQ5 Sportback, Q7, SQ7, Q8, SQ8, and RS Q8	2021 - 2024		
e-tron quattro, and e-tron Sportback quattro	2021 - 2023		
A7 e quattro	2021 - 2022		
A8 e quattro	2021		
A3, S3, RS 3, Q3, Q4 e-tron quattro, and Q4 Sportback e-tron	2022 - 2024		
e-tron S	2022 - 2023		
Q4 e-tron RWD	2023 - 2024		
Q8 e-tron, Q8 Sportback e-tron, SQ8 e-tron, and SQ8 Sportback e-tron	2024		


## Condition



# Technical Service Bulletin

## Customer states:

- The MMI display warns the driver about a “wrong-way driver” (another vehicle that drives on the wrong side of the road), which the driver does not deem relevant for their current location. The warning may refer to events that are a long distance away from the vehicle. After the customer confirms the warning, it may be displayed again a short time later.

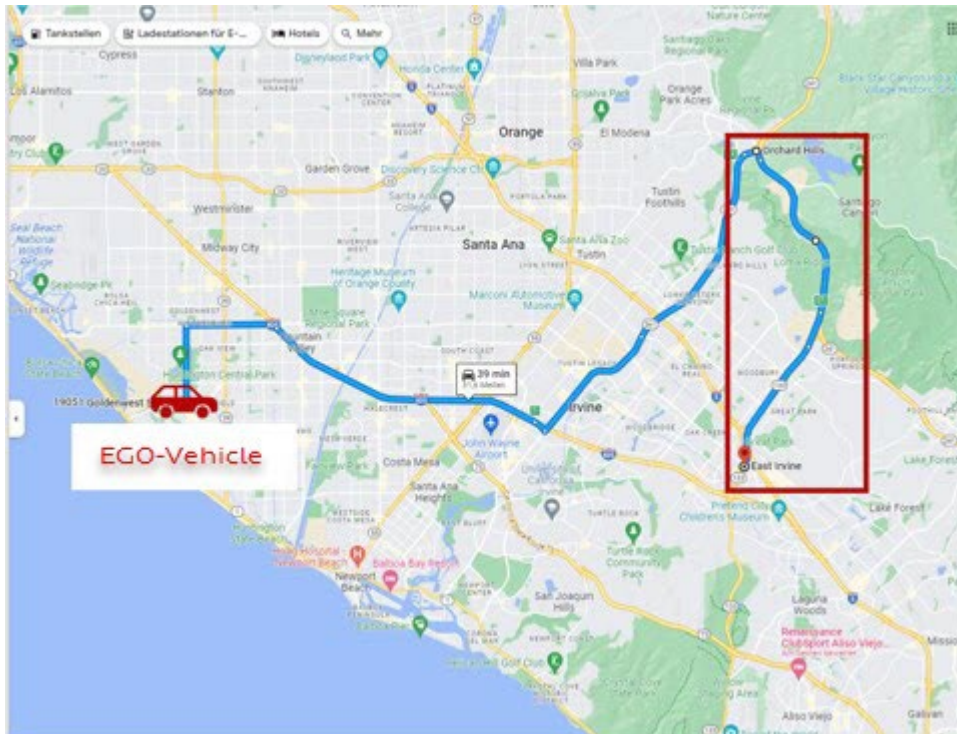

**Figure 1:** Vehicle with active navigation, the marked area is the area with the wrong way driver.

## Technical Background

This behavior corresponds to the intended function of the wrong-way driver warning. All reports in the surrounding 30 miles are relevant for the warning to be displayed, regardless of whether a route guidance is active. Reports outside the radius are only announced if they are on the active route.

If, after the driver has confirmed the warning, the wrong-way driver moves onto another road, the system recognizes this vehicle as another (new) wrong-way driver and the wrong-way driver warning is issued again.

## Production Solution

Not applicable.

## Service



# Technical Service Bulletin

---

No repair is available at this time.

1. Do not perform any repairs. Any repairs for this concern may be denied.
2. Instruct the customer that this condition is normal.

## Workaround:

The wrong-way driver warning currently cannot be switched off individually in the MMI. It is only possible to switch off the wrong-way driver warning by deactivating *online traffic information* in the *privacy settings* of the myAudi app (or under Functions -> *Function overview* in the myAudi portal). Doing so however also switches off all other online traffic information content. As a result traffic flow, traffic obstructions, and traffic information will no longer be displayed on the MMI map and no dynamic traffic jam avoidance will be provided.

## Warranty

This TSB is informational only and not applicable to any Audi Warranty.

## Additional Information

All part and service references provided in this TSB (**2073627**) are subject to change and/or removal. Always check with your Parts Department and/or ETKA for the latest information and parts bulletins. Please check the Repair Manual for fasteners, bolts, nuts, and screws that require replacement during the repair.

©2024 Audi of America, Inc. All rights reserved. The information contained in this document is based on the latest information available at the time of printing and is subject to the copyright and other intellectual property rights of Audi of America, Inc., its affiliated companies, and its licensors. All rights are reserved to make changes at any time without notice. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, nor may these materials be modified or reposted to other sites without the prior expressed written permission of the publisher.