



Technical Service Bulletin

90 Lane departure warning sporadically activates by itself on vehicle startup

90 24 88 2073280/1 May 16, 2024.

Model(s)	Year	VIN Range	Vehicle-Specific Equipment
e-tron, e-tron Sportback, R8, R7 Spyder, and R8 GT	2023	All	Not Applicable
A6, A6 allroad, S6, RS 6 Avant, A7, S7, RS 7, A8, S8, e-tron GT, RS e-tron GT, Q7, SQ7, Q8, SQ8, and RS Q8	2023 - 2025		
Q8 e-tron, Q8 Sportback e-tron, SQ8 e-tron, and SQ8 Sportback e-tron	2024 - 2025		

Condition

Customer states:

- The *lane departure warning* system sporadically activates by itself on vehicle start-up, despite not having been active in the prior drive cycle.



Figure 1: Lane assist symbol in the instrument cluster.

- This complaint usually only happens after the vehicle was parked for multiple minutes (bus-sleep).

Workshop findings:

- No Relevant DTCs are stored.

Technical Background

Due to startup timing, the lane assist activation sporadically isn't suppressed from activating after a bus sleep.

Production Solution



Technical Service Bulletin

Not applicable.

Service

No repair is currently available.

1. Do not perform any repairs. Any repairs for this concern may be denied.
2. Instruct the customer that this condition is normal.

Workaround

- The customer can deactivate the lane departure warning by long pressing the lane keeping button on the turn signal stalk. (> 4sec) (see *Figure 2*).

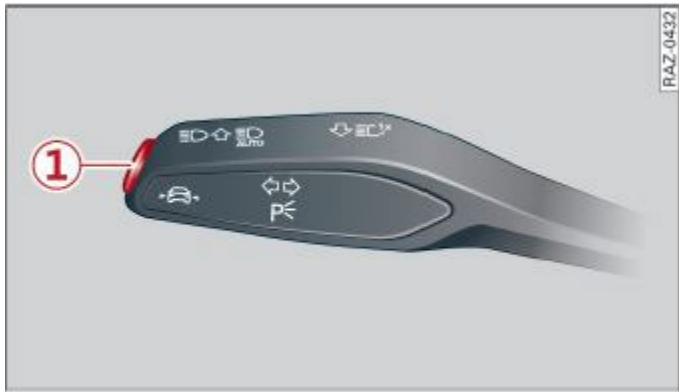


Figure 2: steering column stalk button

- Alternatively, in some models, the lane departure warning system can be deactivated via the driver assist setting menu in the MMI:



>>



>>

Lane Departure Warning

Warranty

This TSB is informational only and not applicable to any Audi Warranty.

Additional Information

All part and service references provided in this TSB (**2073280**) are subject to change and/or removal. Always check with your Parts Department and/or ETKA for the latest information and parts bulletins. Please check the Repair Manual for fasteners, bolts, nuts, and screws that require replacement during the repair.

©2024 Audi of America, Inc. All rights reserved. The information contained in this document is based on the latest information available at the time of printing and is subject to the copyright and other intellectual property



Technical Service Bulletin

rights of Audi of America, Inc., its affiliated companies, and its licensors. All rights are reserved to make changes at any time without notice. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, nor may these materials be modified or reposted to other sites without the prior expressed written permission of the publisher.