



STAR ONLINE PUBLICATION




Case Number: S2408000078

Release Date: July 2024

Symptom/Vehicle Issue: Replacement Totally Integrated Power Module (TIPM) Displays Incorrect Vehicle Identification Number (VIN) Current and Active

Technician Observation: The technician observed after replacing the TIPM that the current and original vin numbers listed in the scan report were from another vehicle. Vehicle set Diagnostic Trouble Code (DTC) B2206 Current VIN Missing/Mismatch.

Discussion: Use the scan tool to access the TIPM module, select the MISC folder > Relearn TIPM VIN procedure.

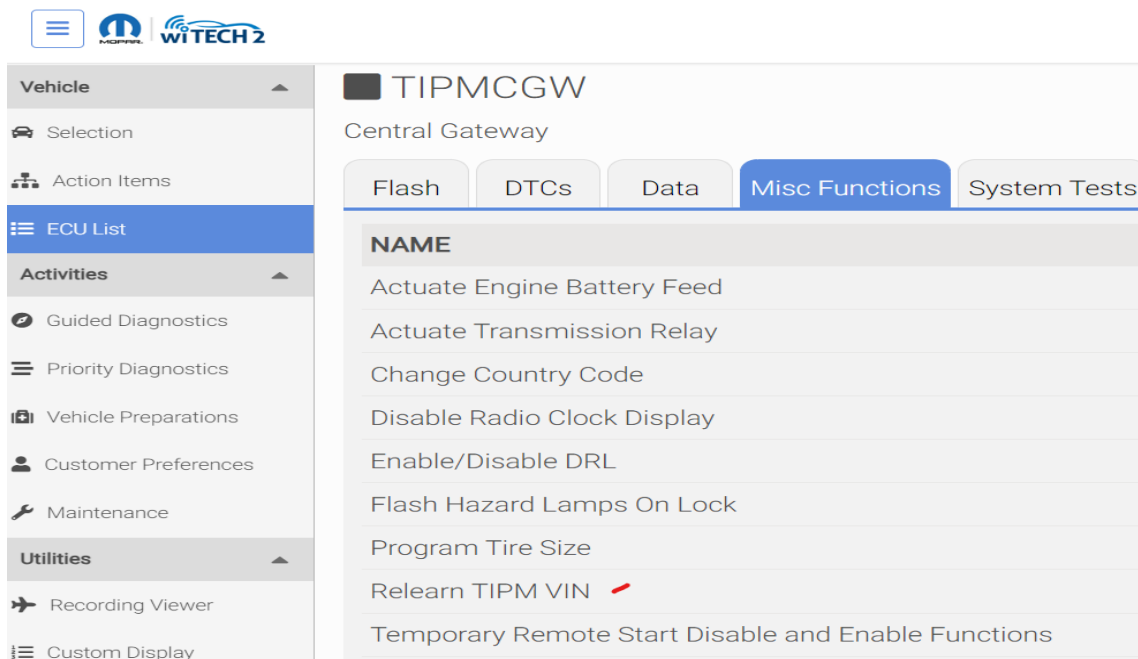

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

Contact STAR Center, or your Technical Assistance Center Via TechConnect, eCONTACT or Service Library entry if no solution is found.