



Exterior Light Switch

Bulletin Type:	SRP	Publication Date:	September 2024
Bulletin #(s):	24-017	Make(s):	Jayco, Entegra Coach
Job Code(s):	<i>If affected unit has a warranty remaining, submit your claim following the normal process.</i>	Model(s):	Swift (20A, 20D, 20T) Swift LI (20AL, 20DL, 20TL) Solstice (21B) Comet (18C) Ethos (20A, 20D, 20T) Ethos LI (20AL, 20DL, 20TL) Expanse (21B) Arc (18C)
Flat Rate(s):		Model Year(s):	2021-2024

Incident:	Exterior light switch fails with weathering.
Affected Units:	2021-2024 Jayco Swift, Swift LI, Solstice, Comet; 2021-2024 Entegra Coach Ethos Ethos LI, Expanse, Arc
Parts List:	1 - SWITCH,PUSH SGL BLK WTRPF 12V (Jayco Part #2067654)
Misc. Tools & Supplies:	Screw Gun with Square Head Bit Wagos Sealant
Parts Return Information:	N/A

EXTERIOR LIGHT SWITCH REPAIR INSTRUCTIONS

**WARNING**

Indicates a potentially hazardous situation that if not avoided, may result in serious injury or death.

**WARNING**

☐ Ensure Main Power has been shut off to the coach prior to performing the repair.

1. Remove the fasteners for the existing switch from the exterior of the coach. (Figure 1)
2. Disconnect the purple wires from the rear of the existing switch. (Figure 1)
3. With the switch free from the coach, remove it from the existing mounting plate.
4. Install the new switch onto the mounting plate. (Figure 2)
5. Connect the pigtail for the new switch to the rear of the switch. (Figure 2)
6. Cut off the female insulated terminals from the purple wires coming from the coach, and strip enough of the wire to be used in a Wago.
7. Using 2 way wagos, connect the red and blue wires from the switch pigtail to the purple wires from the coach. (Figure 3)

a. **NOTE: The green, black, & white wires from the pigtail will not be used.**

8. Add a bead of seal around the perimeter of the mounting plate.
9. Feed the remaining wiring into the coach and resecure the mounting plate with the new switch to the exterior side of the van.
10. Wipe away any excess sealant.



Fig. 1



Fig. 2

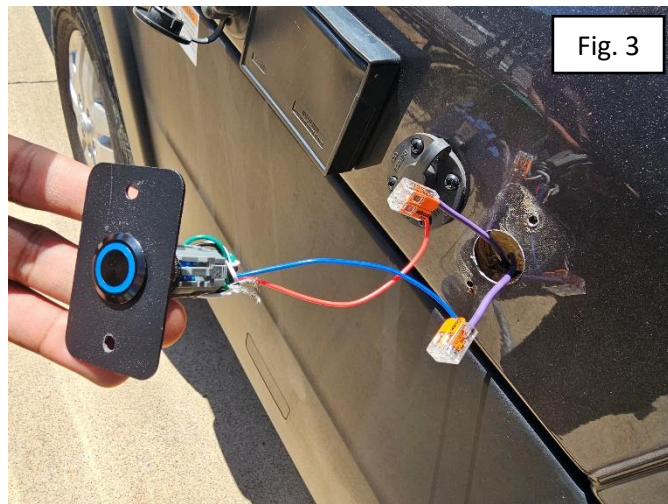


Fig. 3

Jayco's sole obligation under our limited warranty is to repair or replace defective materials and/or workmanship deemed our responsibility as determined by Jayco in our sole discretion. Jayco reserves the right to use new and/or remanufactured parts or materials of similar quality to complete any work, and to make parts and/or design changes as appropriate without notice to anyone. Jayco designs and/or materials changes are done without obligation to incorporate such changes in previously manufactured product. Jayco makes every reasonable effort to ensure field remedies will not adversely affect performance and/or safety of the unit. This field remedy is not intended to extend to future performance of this RV, or any of its materials, components or parts beyond the standard warranty period. The RV owner's obligation to notify Jayco, or one of its independent, authorized dealers, of a claimed defect does not modify any obligation placed on the RV owner to contact Jayco directly when attempting to pursue remedies under state or federal law.

903 South Main Street • P.O. Box 460 • Middlebury, IN 46540