



## STAR ONLINE PUBLICATION




**Case Number:** S2408000105

**Release Date:** September 2024

**Symptom/Vehicle Issue:** Malfunction Indicator Lamp (MIL) on, Battery Lamp on

**Customer Complaint/Technician Observation:** The customer may experience one or more of the following, MIL lamp or battery lamp on, vehicle may enter a limp in mode condition. The technician observed the vehicle setting one or more Diagnostic Trouble Codes (DTCs) P1614-00 Transmission Control Module TCM ECU Reset Recovery, U0101-00 Lost Communication With the TCM, or P2504 Charging System Output, P0563 Battery System Voltage High.

**Repair Procedure:** Inspect, clean and secure the G909B ground location, no parts required.

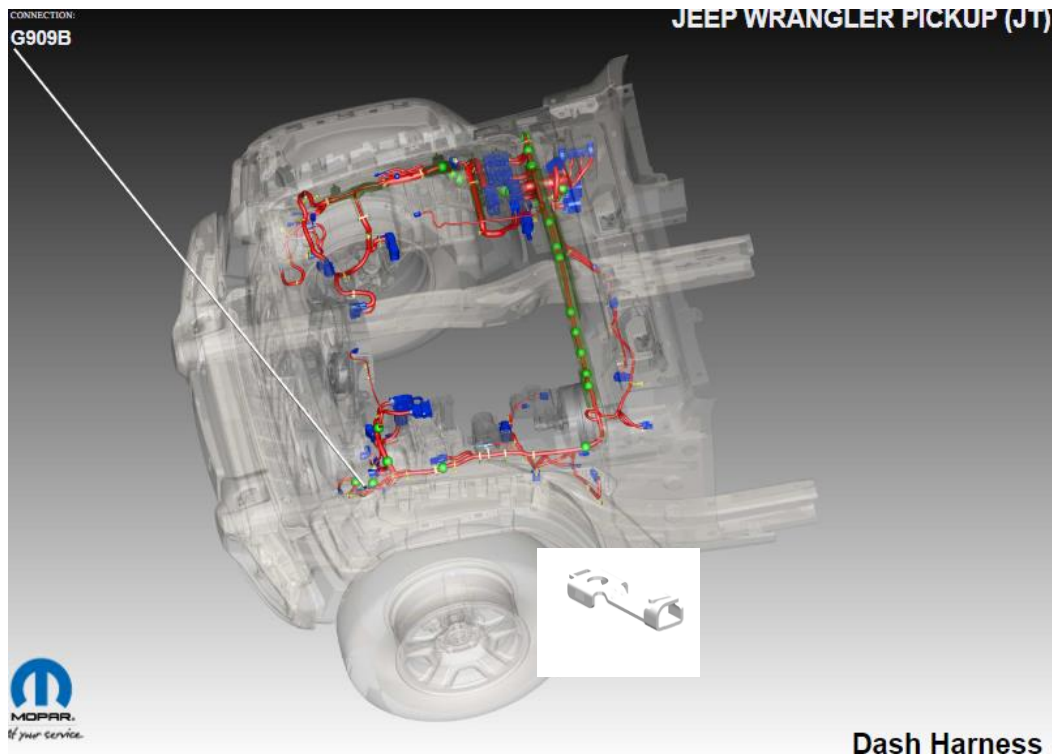

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

**Contact STAR Center, or your Technical Assistance Center Via TechConnect, eCONTACT or Service Library entry if no solution is found.**