

## Damage To The Leather Strap Of The Seat Backrest Lock On The Front Seats

---


Topic number	LI91.10-P-078471
Version	1
Function group	91.10 - Front seats
Date	10/22/24
Validity	BR 236 up to cleanpoint 01.11.2024
Reason for change	

---

### Complaint

Damage to the leather strap of the seat backrest lock on the front seats (Pic.1).

#### Attachments

File	Description
Pic.1.PNG	
	

## Cause

Gap between seat backrest lock and trim ring

## Remedy


- Ordering of new component parts (seat backrest lock and trim ring)
- Clipping of trim ring to the seat backrest lock (holder)
- Push the trim ring downwards
- Apply the hot-melt dot from the inside - at the bottom between the trim ring and the holder of the seat backrest lock (the holder of the seat backrest lock and trim ring must be fixed together) (Pic.2)

## Attachments

File

[Pic.2.PNG](#)

Description

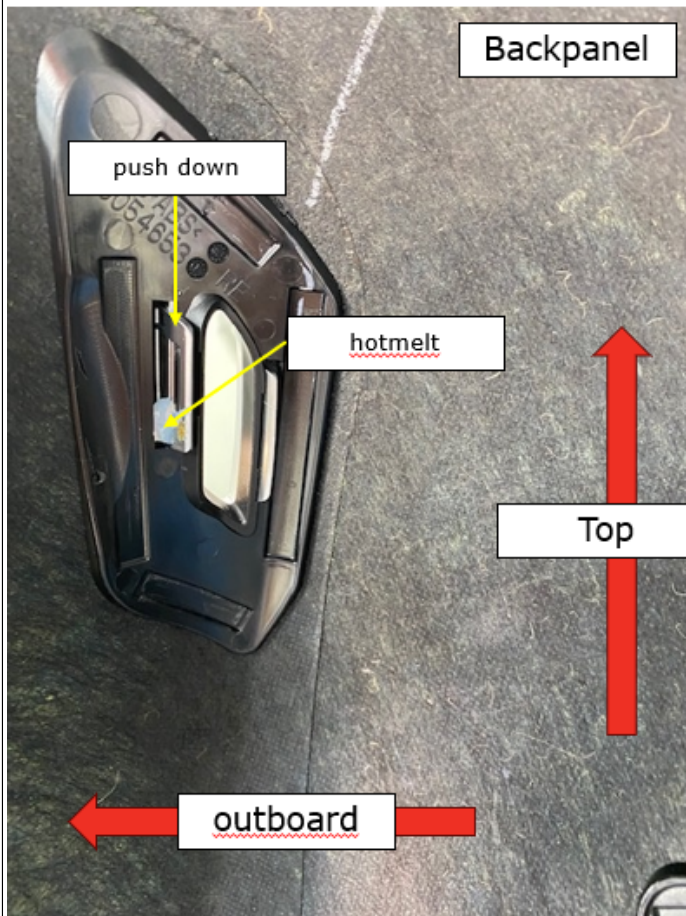

## WIS-References

Document number	Title	Note
AR91.10-P-1110WEC	Remove/install seat backrest lock	

## Disclaimer

# XENTRY Tips

---

NOTE: The information contained in this document is intended for use by trained, professional technicians with the knowledge to properly and safely perform diagnosis and repairs on Mercedes-Benz vehicles, using Mercedes-Benz approved tools and equipment. It informs service technicians about conditions that could occur in certain vehicles and provides information that could assist in proper vehicle diagnosis, service, or repair. It does not indicate that a defect is present in any vehicle referenced in this document nor does it imply warranty coverage. DO NOT assume that a symptom or condition, or a described cause of a symptom or condition, affects any particular vehicle or groups of vehicles, or that a described repair applies to any particular vehicle or groups of vehicles. There can be multiple causes resulting in the same or similar symptoms or conditions described in this document, and trained professional service technicians must use their diagnostic skills to make evaluations on a case-by-case basis. The information contained in this document does not guarantee warranty coverage nor does it extend the vehicle's warranty in any way.

Symptoms
----------

Body > Seat > Seat adjustment > Stiff/sluggish
------------------------------------------------

Body > Seat > Seat cover > Chafed through
-------------------------------------------

Operation numbers/damage codes
--------------------------------

Op. no.	Operation text	Time	Damage code	Note
---------	----------------	------	-------------	------