



91-24-05 - Car Net® 2.0 - Emergency Call Module and Communication Unit -J949- Green Light Does Not Illuminate

Release date: 10/16/2024

## Condition

Applicable Vehicles					
Model(s)	Year	Eng. Code	Trans. Code	VIN Ranger From	VIN Range To
Jetta, Golf, GTI, Passat, Arteon, Tiguan LWB, Atlas, Atlas Cross Sport	2020-2024	All	All	All	All
Taos	2022-2024	All	All	All	All
Golf, GTI, Jetta, Atlas, Atlas Cross Sport	2025	All	All	All	All

Revision Table			
Instance Number	Published Date	Version Number	Reason For Update
2074273/3	10/16/2024	91-24-05	To include MY 2025 applicability.
2074273/2	8/20/2024	91-24-05	To update contact information.
2074273/1	7/3/2024	91-24-05	Original Publication.

## Technical Background

Car-net® 2.0 may not fully complete the initial Register and Pairing process (R&P) after removal of transport mode during ePDI. This may result in a lack of functionality and the green Car-net® LED in the overhead console not illuminating.

On MY 2020 - 2025 vehicles equipped with Car-Net® 2.0 while performing the PDI:

Once you take the vehicle out of transport mode, it may take up to 30 minutes for the system to come on line. The green light is an indicator that the vehicle has made a good connection.

No green light ON indicates that no connection was established. All vehicles equipped with Car-Net® 2.0 will need the green light ON, prior to being delivered to the customer.

## Production Solution

Not applicable.



91-24-05 - Car Net® 2.0 - Emergency Call Module and Communication Unit -J949- Green Light Does Not Illuminate

Release date: 10/16/2024

### Service

In order for Car-Net 2.0 to successfully complete the R&P process, perform the transport mode removal test plan titled “Perform service work for vehicle handover”, auto-populated under Guided Fault Finding (GFF) which includes activation & registration of the OCU”. Once the test plan completes, check if the green light is illuminated. If it still is not illuminated, take the vehicle outside and let it run for approximately 15-20 minutes.

If the concern still remains and the green light is not illuminated, perform the following steps:

Part 1.

- 1.1. Connect the ODIS tester to the vehicle and initiate Guided Fault Finding (GFF).
- 1.2. Once the GFF module interrogation is complete, select Address 0075 Emergency Call Module and “right click”, then select “Adaptation”.
- 1.3. Search for “mobile online services, activation threshold”. If the “Current value” is NOT 0, manually change the value to 0, then attempt to re-initiate the R&P process.

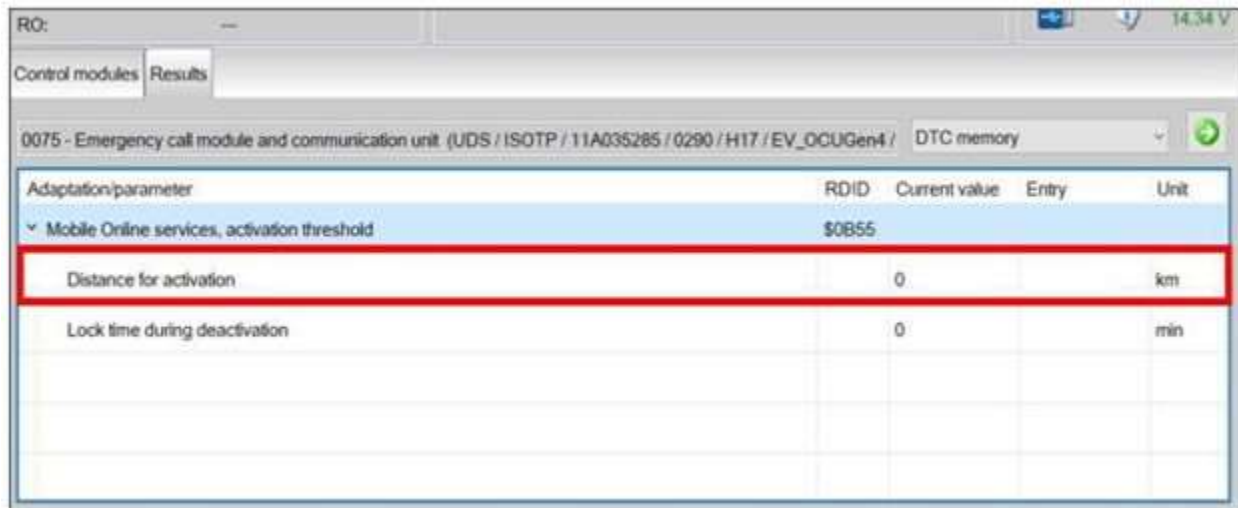


Figure 1.

If there is no change in the condition, check the measured value in Address 0075 via “Read measuring values” and search for “Status GPS Reception” and “Connection status”.

Status GPS Reception should show a minimum value of 3 satellites. Connection status Validity should read “Valid”.

**91-24-05 - Car Net® 2.0 - Emergency Call Module and Communication Unit -J949- Green Light Does Not Illuminate**

Release date: 10/16/2024



Figure 2.

If there is still no change in the condition, proceed to step Part 2.

**Part 2 (With Ignition OFF)**

- 2.1. Open the driver door.
- 2.2. To the left and below the steering wheel, open and remove the pull out compartment door (Approx. 4"x 6") by pressing the detent lever inside/above, exposing the fuse box.
- 2.3. Remove the 7.5 amp fuse in position SC17 (for all MQB platform vehicles).The instrument cluster losing power is an indication that the proper fuse was pulled. (Figure 3.) Remove the 7.5 amp fuse in position SC19 (for all MQB-37W platform vehicles). (Figure 4.)
- 2.4. Wait 5 minutes with the fuse out to allow the Control Module for Emergency Call Module and Communication Unit -**J949**- internal backup battery to completely discharge.
- 2.5. Re-insert the fuse into the slot and reinstall the pull out door.
- 2.6. Switch the vehicle ignition ON and observe the 3 button module for 2 minutes.
- 2.7. If the green light illuminates, the process was successful.
- 2.8. If the green light is not illuminated after 2 minutes, keep the vehicle running outside for an additional 20 minutes to allow the process to complete.
- 2.9. After 20 minutes, if the green light is illuminated, the process is complete.
- 2.10. If the green light is not illuminated, switch the vehicle OFF and create a VW Helpline Web Ticket.

**91-24-05 - Car Net® 2.0 - Emergency Call Module and Communication Unit -J949- Green Light Does Not Illuminate**

Release date: 10/16/2024



Figure 3. SC17



Figure 4. SC19

## Warranty

Information only.

## Required Parts and Tools

No Special Parts required.

No Special Tools required.

## Additional Information

All part and service references provided in this Technical Bulletin are subject to change and/or removal. Always check with your Parts Dept. and Repair Manuals for the latest information.