



RYKER 2025 Unit Inspection Required - 143625

Article Detail


Problem:

The fuel tank upper rubber pad might not have been installed properly. Also, the steering column might be in contact with the airbox.


Solution:

Please refer to the attached PDF for the fuel tank inspection.

For the steering column, add 2 shims (707002397) under RH ENGINE supports. *Note that don't install more than 2 shims under RH support because of possible contacts on other parts above the engine.

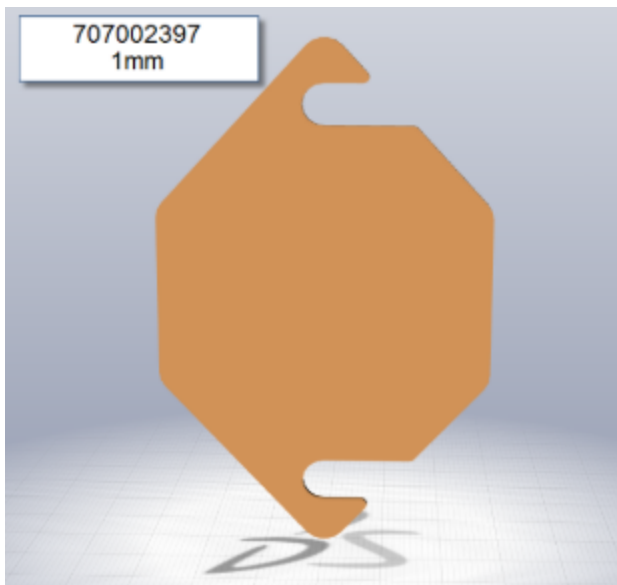

Inspection Procedure:

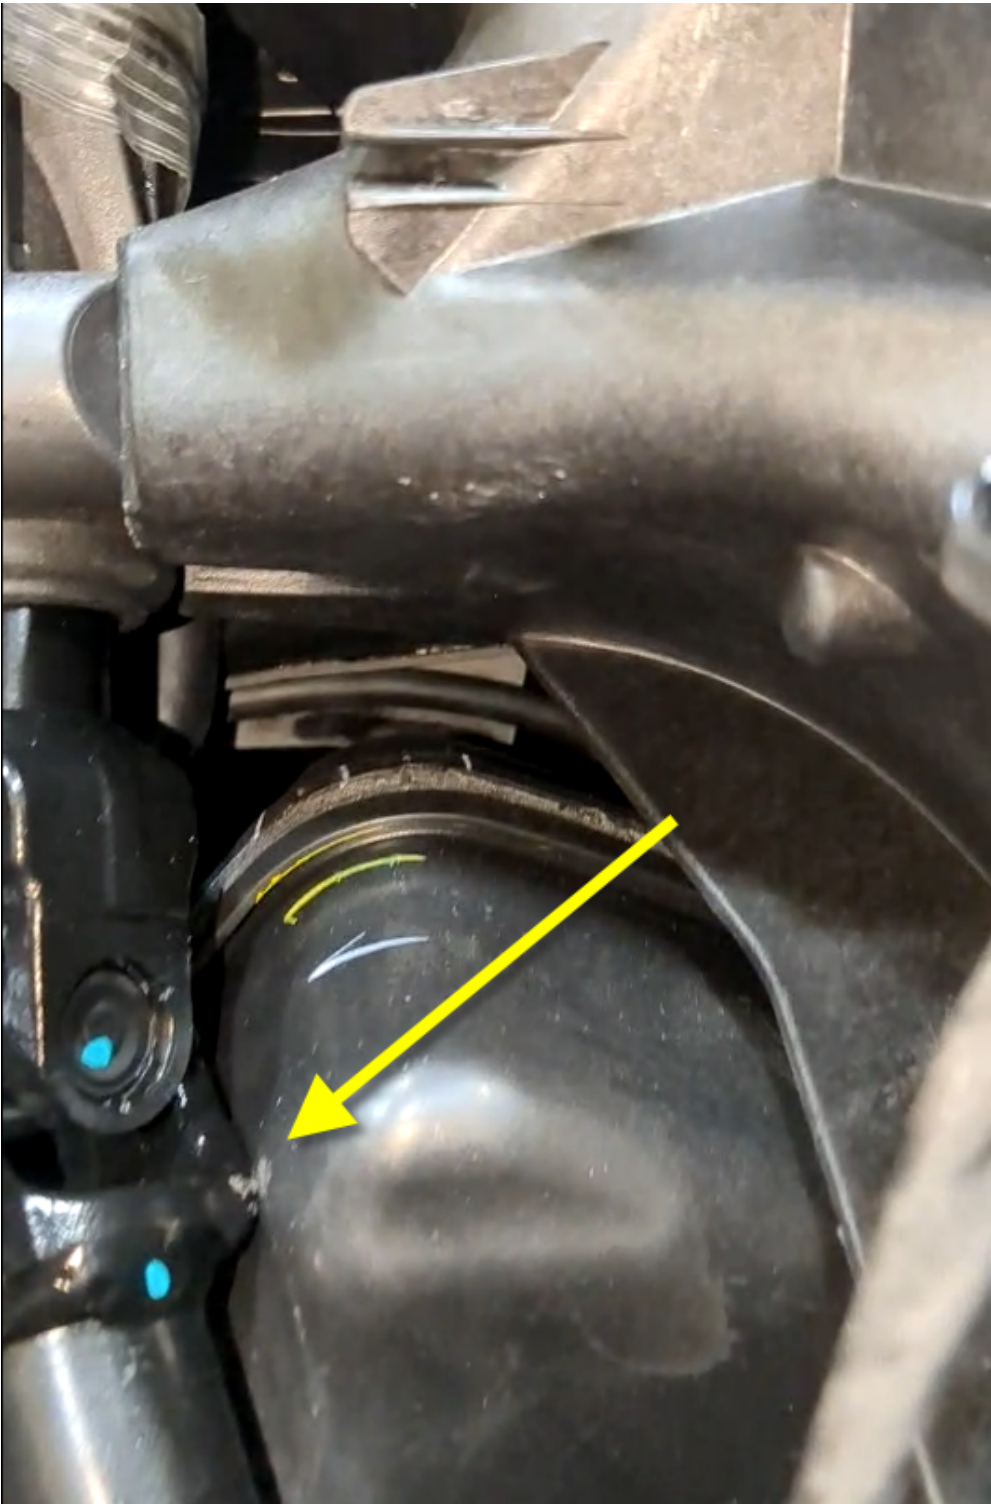

Warranty:

0.5h can be claimed under PDI claim, refer to this M&A in your comments

First Published By: Eric Fauteux on 01/17/2025

Last Modified By: Eric Fauteux on 01/17/2025

[Rework method rubber pad.pdf](#)