



STAR ONLINE PUBLICATION




Case Number: S2508000002 Rev. A

Release Date: February 2025

Symptom/Vehicle Issue: Mapping Interface Module (MIM) Erroneously Sets Diagnostic Trouble Codes (DTCs) B023C-49 and or U115C-00

Technician Observation: Technician observed the MIM module setting DTCs B0239C-49 DASHCAM Module 1 Internal Electronic Failure and/or U115C-00 Lost Communication With ETM.

Repair Procedure: If these DTCs are observed, clear the DTCs, perform a reset ECU as listed in the Guided Diagnostics for the MIM module, then allow a sleep cycle. Re-connect the scan tool and verify that the DTCs do not return, if the DTCs do return, then continue with the Service Library (SL) diagnostic procedure(s) as needed. Engineering is investigating the concern relating to the DTCs setting erroneously and they will notify the field when updates are available.

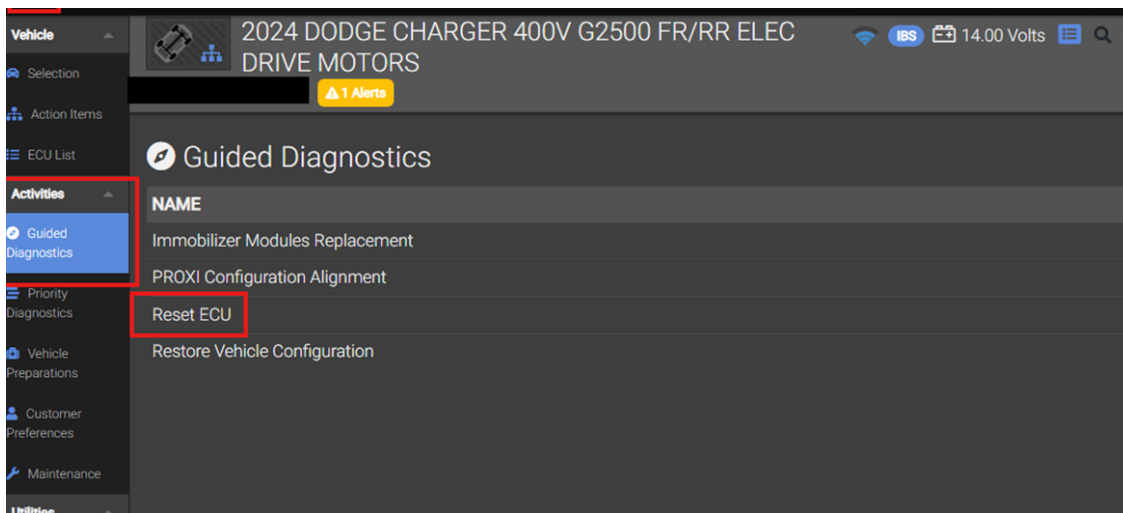

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Center Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.