

PORSCHE Projector UD1

Change
Overview:

Release	Date	Change
0	06/17/2019	▪ First publication
1	01/05/2024	▪ Update of parts info
2	04/02/2025	▪ Update of parts info

Model Year: **As of 2019**

Cause: **Retrofitting**

Note: The PORSCHE projector is a small lighting element that projects the word of the respective projector onto the floor as soon as the respective vehicle door is opened.



Figure 1 (Example of PORSCHE logo)

Part No.:	9Y0.044.911	1x	⇒ Set (2 units) projector "PORSCHE" ⇒ <i>Figure 2 -1-</i>
	992.088.945	1x	⇒ Set (2 units) "Roughroads" projector ⇒ <i>Figure 2 -1-</i>
	992.044.914	1x	⇒ "Born in Flacht" projector set (2 units) ⇒ <i>Figure 2 -1-</i>
	992.088.945.A	1x	⇒ "Icons of Cool" projector set (2 units) ⇒ <i>Figure 2 -1-</i>
	992.044.914.B	1x	⇒ "Turbo 50" projector set (2 units) ⇒ <i>Figure 2 -1-</i>

The following parts must also be ordered, screws on door panel, please observe the guidelines for mounting positions.

N 908.249.02 4x ⇒ Screws on door panel



Figure 2

Tool: **P90999 - PIWIS Tester 4**

Work
Procedure:



Information

Since the size and shape of the PORSCHE projector differs from the door warning light installed in the vehicle, the door panels **must** be removed.

1 Removing door panels

- 1.1 Remove door panels on driver's and passenger's side. ⇒ *Workshop Manual 'Removing and installing front door panel'*
- 1.2 Remove door guard light.
- 1.3 Insert PORSCHE projector "at the bottom" so that the retaining lugs at the left and right ⇒ *Figure 3 -1-* are engaged securely. Clip in projector "at the top" and make sure that the retaining lugs at the left and right ⇒ *Figure 3 -2-* engage. Check that the projector is installed securely.
- 1.4 Install door panels on driver's and passenger's side. ⇒ *Workshop Manual 'Removing and installing front door panel'*

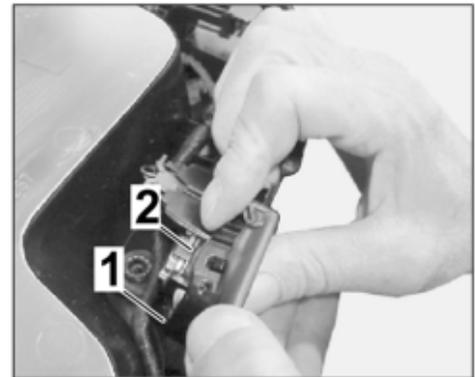


Figure 3

2 Follow-up actions

- 2.1 Read out and erase the fault memory. ⇒ *Workshop Manual 'Fault memory for on-board diagnosis'*

Labor time: Install 96162440 PORSCHE projector.

Labor time: **110 TU**

Includes: Removing and installing door panels on driver's and passenger's side, reading out and erasing fault memory

Important Notice: Technical Bulletins issued by Porsche Cars North America, Inc. are intended only for use by professional automotive technicians who have attended Porsche service training courses. They are written to inform those technicians of conditions that may occur on some Porsche vehicles, or to provide information that could assist in the proper servicing of a vehicle. Porsche special tools may be necessary in order to perform certain operations identified in these bulletins. Use of tools and procedures other than those Porsche recommends in these bulletins may be detrimental to the safe operation of your vehicle, and may endanger the people working on it. Properly trained Porsche technicians have the equipment, tools, safety instructions, and know-how to do the job properly and safely. Part numbers listed in these bulletins are for reference only. The work procedures updated electronically in the Porsche PIWIS diagnostic and testing device take precedence and, in the event of a discrepancy, the work procedures in the PIWIS Tester are the ones that must be followed.

© 2025 Porsche Cars North America, Inc.