



TECHNICAL SERVICE BULLETIN

Classification: BT25-009	Reference: NTB25-031	Date: June 16, 2025
-----------------------------	-------------------------	------------------------

CLICKING NOISE WHEN OPENING DRIVER DOOR

APPLIED VEHICLES: 2025 Murano (Z53)
APPLIED DATES: Built on or before May 30, 2025

SERVICE INFORMATION

If a popping / clicking noise is present from one or more of the Door Check Links (Figure 1) when opening the associated door:

First confirm that the torque of the door side mounting bolts of the related Door Check Link is at the correct specification, and then retest for popping / clicking before considering replacing the Door Check Link.

- Refer to the ESM: **BODY EXTERIOR, DOORS, ROOF & VEHICLE SECURITY - DOOR & LOCK - REMOVAL AND INSTALLATION - DOOR - DOOR CHECK LINK**
- There are two (2) door side mounting bolts per door and a total of eight (8) per vehicle.

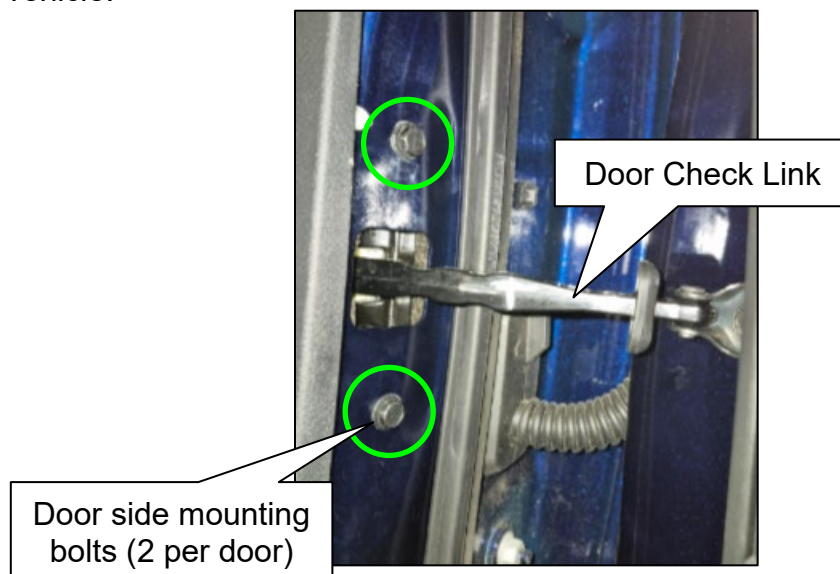


Figure 1

Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. **NOTE:** If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

AMENDMENT HISTORY

PUBLISHED DATE	REFERENCE	DESCRIPTION
June 16, 2025	NTB25-031	Original bulletin published

