



# Service Bulletin

Bulletin No.: PIT6401

Date: June, 2025

## PRELIMINARY INFORMATION

**Subject: Horn Honks When Shutting Doors When Keys Are Left in Vehicle With Key Left In Vehicle Reminder Turned Off**

Brand:	Model:	Model Year:		VIN:		Engine:	Transmission:
		from	to	from	to		
Buick	Envision	2021-2026		ALL	ALL	ALL	ALL
Buick	Enclave	2025-2026		ALL	ALL	ALL	ALL
BrightDrop	Zevo 400	2024		ALL	ALL	ALL	ALL
BrightDrop	Zevo 600	2023-2024		ALL	ALL	ALL	ALL
BrightDrop	EV600	2022		ALL	ALL	ALL	ALL
Cadillac	CT4	2020-2026		ALL	ALL	ALL	ALL
Cadillac	CT5	2020-2026		ALL	ALL	ALL	ALL
Cadillac	Escalade	2021-2026		ALL	ALL	ALL	ALL
Cadillac	Escalade ESV	2025-2026		ALL	ALL	ALL	ALL
Cadillac	Escalade IQ EV	2025-2026		ALL	ALL	ALL	ALL
Cadillac	Lyriq	2023-2026		ALL	ALL	All	ALL
Cadillac	Optiq	2025-2026		ALL	ALL	ALL	ALL
Cadillac	XT4	2024-2025		ALL	ALL	ALL	ALL
Cadillac	Vistiq	2026		ALL	ALL	ALL	ALL
Chevrolet	Blazer EV	2024-2025		ALL	ALL	ALL	ALL
Chevrolet	BrightDrop 400	2025-2026		ALL	ALL	ALL	ALL
Chevrolet	BrightDrop 600	2025-2026		ALL	ALL	ALL	ALL
Chevrolet	Colorado	2023-2026		ALL	ALL	ALL	ALL
Chevrolet	Equinox	2025-2026		ALL	ALL	ALL	ALL
Chevrolet	Equinox EV	2024-2025		ALL	ALL	ALL	ALL
Chevrolet	Silverado 1500 New (RPO J22, VIN Digit 5= A or D)	2022		ALL	ALL	ALL	ALL
Chevrolet	Silverado 1500	2023-2026		ALL	ALL	ALL	ALL
Chevrolet	Silverado 2500HD	2024-2026		ALL	ALL	ALL	ALL
Chevrolet	Silverado 3500HD	2024-2026		ALL	ALL	ALL	ALL
Chevrolet	Silverado EV WT	2024-2026		ALL	ALL	ALL	ALL

Brand:	Model:	Model Year:		VIN:		Engine:	Transmission:
		from	to	from	to		
Chevrolet	Silverado EV RST	2024-2026		ALL	ALL	ALL	ALL
Chevrolet	Suburban	2021-2026		ALL	ALL	ALL	All
Chevrolet	Tahoe	2021-2026		ALL	ALL	ALL	ALL
Chevrolet	Traverse (All New)	2024-2026		ALL	ALL	ALL	ALL
GMC	Acadia	2024-2025		ALL	ALL	ALL	ALL
GMC	Canyon	2023-2025		ALL	ALL	ALL	ALL
GMC	Hummer EV	2022-2026		ALL	ALL	ALL	ALL
GMC	Hummer SUV	2024-2026		ALL	ALL	ALL	ALL
GMC	Sierra 1500 New (RPO J22, VIN Digit 5= U or H)	2022		ALL	ALL	ALL	ALL
GMC	Sierra 1500	2023-2026		ALL	ALL	ALL	ALL
GMC	Sierra 2500HD	2024-2026		ALL	ALL	ALL	ALL
GMC	Sierra 3500HD	2024-2026		ALL	ALL	ALL	ALL
GMC	Sierra Denali EV	2024-2026		ALL	ALL	ALL	ALL
GMC	Terrain	2025-2026		ALL	ALL	ALL	ALL
GMC	Yukon	2021-2026		ALL	ALL	ALL	ALL
GMC	Yukon XL	2021-2026		ALL	ALL	ALL	ALL

<b>Involved Region or Country</b>	North America, Europe, Kazakhstan, Uzbekistan, Russia, Middle East, Israel, Palestine, Argentina, Brazil, Bolivia, Chile, Columbia, Ecuador, Paraguay, Peru, Uruguay, Japan, S. Korea, Thailand, Australia/New Zealand, Other Africa
<b>Condition</b>	With the "Key Left in Vehicle Reminder" turned off the horn still honks / chirps 3 times after closing the doors with the key / fob left inside the vehicle. See the photo below for an example of the settings.
<b>Cause</b>	This can be caused by the Auto Door Unlock selection being set to off and when the vehicle is placed into park and the ignition turned off the doors will remain locked. To exit the vehicle the driver must unlock the doors and if they manually override the unlock by pulling the inside door handle the BCM will not recognize that the door is unlocked. The BCM must command the door unlock to recognize the door is unlocked. If the BCM does not command the unlock, then the lockout deterrent function defaults the doors to locked. Then, when the key fob is left inside a locked vehicle, it takes the action of unlocking the driver's door. This unlock action triggers the horn chirp. This horn chirp is the same horn chirp as the Key Left in Vehicle Reminder chirp.


Example of Key Left in Vehicle Reminder setting: (May differ slightly on various models)



6960003

### Correction

The vehicle is operating as designed if the Auto Door Unlock setting is set to OFF and the door is manually unlocked by pulling the inside door handle. If the customer wishes to leave the setting at "OFF", then to resolve the issue use either the power door lock button on the door panel or fob to unlock the vehicle. In addition, the Auto Door Unlock setting can be changed from OFF to either "Driver Door" or "All Doors", as shown below, which will also eliminate the concern.

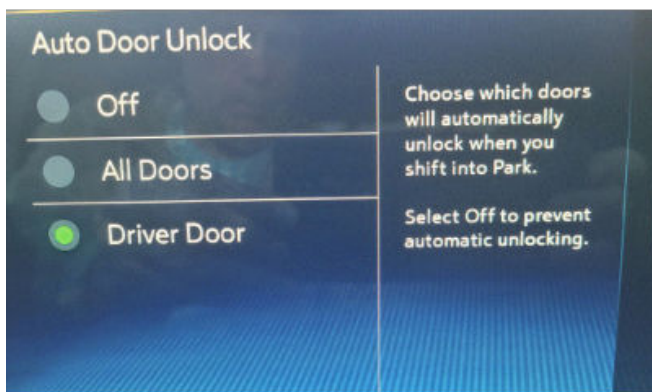

6960002

### Additional SI Keywords

beep, beeps,

Version	1
Modified	06/16/2025 - Created.

