


# SS 3178 - FTL Fifth Generation Cascadia Trailer Hand Brake Error

## Applicable Vehicles

Model Year 2026 Fifth Generation Cascadia equipped with a trailer hand brake valve

## Symptoms

You may see a red pop up indicating a park brake malfunction, as well as a red braking telltale set in the cluster. In certain cases, these indications may be a nuisance fault and not an actual park brake malfunction.

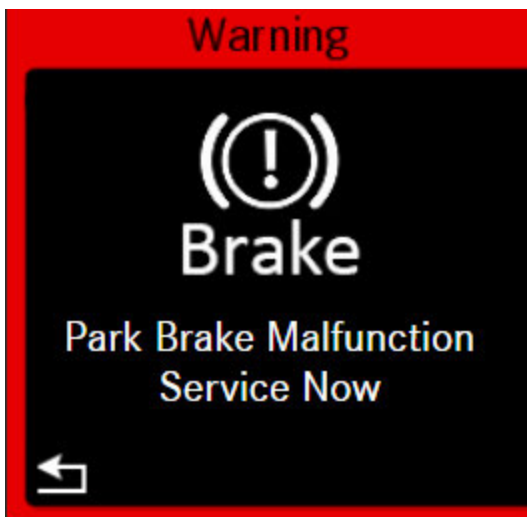

## **Issue**

The calibration data received from the ETHC sensor is out of range and missing one bit of the frame, causing the EPBC to send ETHC signal to an error state.

## **Solution**

To clear the popup and telltale the vehicle will need to go through a sleep cycle. If equipped the battery disconnect switch can be used otherwise disconnecting the negative battery cables will work.

Labels :

**Parking Brake**

Add tags



1 Kudo

Comment