

SS 306 TBB HDX DEF Header Service Replacement Additional Parts

Applicable Vehicles

TBB HDX

Symptoms

DEF Header Failure replacement

Issue


Original SSI DEF Header, which has been discontinued, has failed and needs to be replaced.

Replacement KUS DEF header

04-37614-000 must be used as replacement, but requires some additional parts and re-routing of DEF

Pump Supply Coolant line. Refer below for how item 20 is routed which you will need to reroute.

Note, the coolant line may need to be cut to length for better fit.

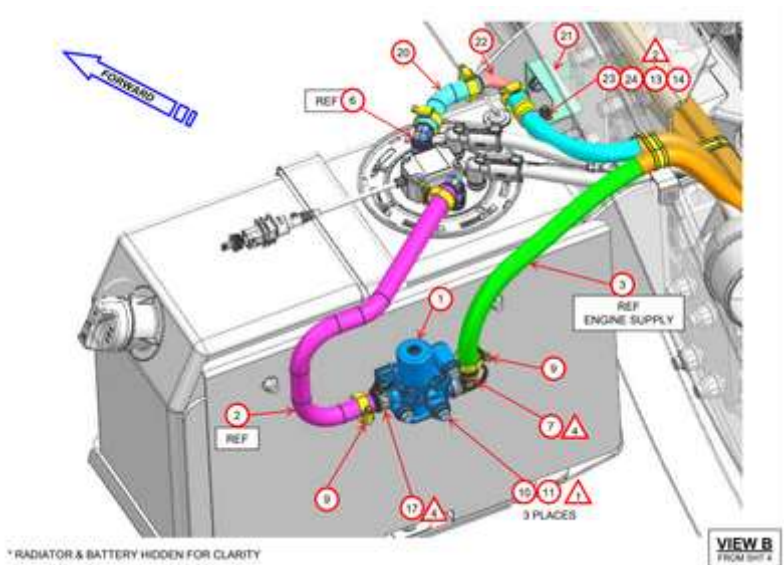

Solution

TBB 62410243 replace with 209494 HOSE - EPDM, 72 INCH LENGTH

TBB 62190462 replace with 209496 HOSE - SILICONE, 72 INCH LENGTH

TBB 162366 replace with TBB 209495 HOSE - BLUE STRIPE, 72 INCH Length

Labels :

Transit-Liner

Add tags



0 Kudos

Comment